



Grande Centre Point Space Pattaya (Thailand)



Temple of Brunello, Siena (Italy)



Grand Cube Osaka International Convention Center (Japan)

PROJECTORS

Line-up Catalog October 2023



Worldwide Olympic and Paralympic Partner



Panasonic Projectors product lineup



3-Chip DLP™ Laser light source models



1-Chip DLP™ Laser light source models

LCD models

50,000 lm



● **PT-RQ50K** >P3
50,000 lm




● **PT-RQ35K** >P3
30,500 lm



● **PT-RZ34K** >P4
30,500 lm




● **PT-RQ25K** >P5
20,000 lm



● **PT-RZ24K** >P5
20,000 lm



● **PT-RQ18K** >P6
16,000 lm



● **PT-RZ17K** >P6
16,000 lm



10,000 lm



NEW
● **PT-REQ12 Series** >P7
8,000-12,000 lm




NEW
● **PT-REZ12 Series** >P9
8,000-12,000 lm



● **PT-RCQ10 Series** >P10
8,000-10,000 lm



● **PT-FRQ60 Series** >P13
5,200-6,000 lm



● **PT-FRZ60 Series** >P14
5,200-6,000 lm



● **PT-FRZ55** >P14
5,000 lm



5,000 lm

SOLID SHINE Series



● **PT-MZ20K Series** >P15
11,000-20,000 lm



*HDMI/DIGITAL LINK input only.



● **PT-MZ880 Series** >P17
6,000-8,000 lm



*HDMI/DIGITAL LINK input only.



● **PT-VMZ71 Series** >P25
4,500-7,000 lm



*HDMI/DIGITAL LINK input only. Supports signal up to 4K/30p.



● **PT-LMZ460 Series** >P28
4,200-4,600 lm



*HDMI input only. Supports signal up to 4K/30p.



● **PT-CMZ50** >P38
5,200 lm



*HDMI/DIGITAL LINK input only. Supports signal up to 4K/30p.



● **PT-TMZ400 Series** >P35
3,800-4,000 lm



*HDMI input only. Supports signal up to 4K/30p.



● **PT-EZ770 Series** >P19
6,500-7,500 lm



● **PT-EZ590 Series** >P21
5,000-6,200 lm



● **PT-FZ570 Series** >P23
4,500-5,000 lm



● **PT-VZ580 Series** >P30
5,000-5,500 lm



● **PT-VW360 Series** >P32
4,000-4,500 lm






● **PT-TW381R Series** >P37
3,200-3,800 lm



● **PT-LB426 Series** >P33
3,100-4,100 lm

- Large-Venue
- Installation
- Portable
- Short Throw/
Ultra Short Throw

Large-Venue

	PT-RQ50K	PT-RQ35K	PT-RZ34K
	 50,000 lm / 51,000 lm (Center) ⁷ Native 4K ⁶ * Lens sold separately.	 30,500 lm / 32,000 lm (Center) ⁷ 4K ⁶ * Lens sold separately.	 30,500 lm / 32,000 lm (Center) ⁷ WUXGA * Lens sold separately.
Projector type	3-Chip DLP™ Projector	3-Chip DLP™ Projector	3-Chip DLP™ Projector
DLP Chip			
Panel size	35.1 mm (1.38 in)	24.4 mm (0.96 in)	24.4 mm (0.96 in)
Aspect ratio	17:9	16:10	16:10
Number of pixels	8,847,360 (4,096 x 2,160) pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels
Light source	Laser diodes	Laser diodes	Laser diodes
Light output	50,000 lm / 51,000 lm (Center) ⁷	30,500 lm / 32,000 lm (Center) ⁷	30,500 lm / 32,000 lm (Center) ⁷
Time until light output declines to 50%¹	20,000 hours (NORMAL)/ 24,000 hours (ECO)	20,000 hours (NORMAL)/ 24,000 hours (ECO)/ 26,000 hours (QUIET)	20,000 hours (NORMAL)/ 24,000 hours (ECO)/ 26,000 hours (QUIET)
Resolution	Native 4K (4,096 x 2,160)	4K (3,840 x 2,400)	WUXGA (1,920 x 1,200)
Contrast ratio (full on/full off)	20,000:1	20,000:1	20,000:1
Screen size (diagonal)	2.54-38.1 m (100-1,500 in)	1.78-25.4 m (70-1,000 in) ¹¹	1.78-25.4 m (70-1,000 in) ¹¹
Lens shift²	Vertical: ±45 % ⁸ , Horizontal: ±16 % ⁸ (powered)	Vertical: ±55 % ¹² , Horizontal: ±20 % ¹² (powered)	Vertical: ±55 % ¹² , Horizontal: ±20 % ¹² (powered)
Filter Replacement Cycle	- (No filter)	- (No filter)	- (No filter)
Terminals	Multi Projector SYNC in [BNC x 1] Multi Projector SYNC out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 1] DC out [USB type-A x 2 (for power supply (DC 5 V, up to 2 A))] USB [USB type-A x 1, for USB Memory Stick / Wireless Module (AJ-WM50)] Slot 1 [Pre-installed with ET-MDN12G10] Slot 2 [Vacant for compatible SLOT NX boards (optional)]	HDMI in [HDMI 19-pin x 1] HDMI out [HDMI 19-pin x 1] Multi Projector SYNC out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 2] DC out [USB type-A x 2 (for power supply (DC 5 V, up to 2 mA))] Slot 1/2 [Vacant for compatible input boards, SLOT NX compatible (optional)]	SDI in [BNC x 2 (3G/HD/SD-SDI)] HDMI in [HDMI 19-pin x 1] DVI-D in [DVI-D 24-pin x 1] 3D SYNC 1 in/out / Multi Projector Sync in [BNC x 1] 3D SYNC 2 out / Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 2] DC out [USB type-A x 2 (for power supply (DC 5 V, up to 2 mA))] Slot 1 [Vacant for compatible SLOT NX boards (optional)]
Power supply	100-240 V AC, 50/60 Hz ⁹	100-240 V AC, 50/60 Hz ⁹	100-240 V AC, 50/60 Hz ⁹
Power consumption by mode	Normal: 3.970 W Eco: 3.110 W Standby: 6 W Max: 4,100 W	Normal: 2.060 W Eco: 1.650 W Standby: 14 W Max: 2,550 W	Normal: 2.010 W Eco: 1.590 W Standby: 13 W Max: 2,450 W
BTU value	Max. 13,560 BTU	Max. 8,713 BTU	Max. 8,371 BTU
Operation noise	52 dB	49 dB (Normal)/46 dB (Quiet)	49 dB (Normal)/46 dB (Quiet)
Dimensions (W x H³ x D⁴)	720 x 445 x 1070 mm (28-11/32 x 17-9/16 x 42-1/8 in)	598 x 353 x 780 mm (23-17/32 x 13-29/32 x 30-23/32 in)	598 x 353 x 780 mm (23-17/32 x 13-29/32 x 30-23/32 in)
Weight⁵	Approx. 126 kg/278 lbs	Approx. 69.8 kg/154 lbs	Approx. 68.6 kg/152 lbs
Optional accessories	ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹⁰ ET-MDN12G10 (12G-SDI Input Board) ET-MDNHM10 (HDMI Input Board) ET-MDNDV10 (DVI-D Input Board) ET-MDNDP10 (DisplayPort Input Board) ET-MDNFB10 (12G-SDI Optical Input Board) ET-NUK10 (NFC Upgrade Kit) ¹⁰	ET-D75MKS10 (Stepping Motor Kit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹⁰ ET-MDNDV10 (DVI-D Input Board) ET-MDNHM10 (HDMI Input Board) ET-MDN12G10 (12G-SDI Input Board) ET-MDNDP10 (DisplayPort Input Board) ET-MDNFB10 (12G-SDI Optical Input Board) ET-MDNFB10 (12G-SDI Optical Input Board) ET-SUK10 (High Frame Rate Upgrade Kit) ET-NUK10 (NFC Upgrade Kit) ¹⁰	ET-D75MKS10 (Stepping Motor Kit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹⁰ ET-MDNDV10 (DVI-D Input Board) ET-MDNHM10 (HDMI Input Board) ET-MDN12G10 (12G-SDI Input Board) TY-TBN03G (3G-SDI Input Board) ET-MDNDP10 (DisplayPort Input Board) ET-MDNFB10 (12G-SDI Optical Input Board) ET-NUK10 (NFC Upgrade Kit) ¹⁰
Optional lens	Yes (see the Optional Lenses page: P39)	Yes (see the Optional Lenses page: P41)	Yes (see the Optional Lenses page: P41)

1: After approximately 20,000 hours, cleaning needs to be performed (by the vendor which you purchased from). The light source's lifetime may be shortened due to environmental conditions and operating mode. 2: The lens shift cannot be used or its range of operation is limited with a fixed-focus lens. 3: Height: with legs at shortest position. 4: Depth: protruding parts not included. 5: Average value. Each product has an individual variable in weight. 6: Resolution 3,840 x 2,400 Pixels (QUAD PIXEL DRIVE: ON) 7: Luminance measured at center of screen.

8: Vertical ±25 % and horizontal ±8 % with the ET-D3QT600. 9: Brightness restricted with voltage lower than 200 V. 10: Product availability may vary by country or region. To use NFC function, Smart Projector Control App is required. 11: 1.78-15.24 m (70-600 in) with the ET-D75LE8/D3LET80. 3.05-15.24 m (120-600 in) with the ET-D75LE6/ET-D3LEW60.

Smart Projector Control


FEATURES



Smart Projector Control is an application software for smartphones that enables the operation of Panasonic projectors. By connecting your iPhone/Android terminal to a projector with wireless LAN (Wi-Fi), a variety of controls, such as turning the power on and off to various lens adjustments are possible. The hassles associated with the remote control and main body buttons are solved with easy tap controls, contributing to improved efficiency for the customer.

NFC Function

Easily access the setting information by simply holding your smartphone over the device even when the power is turned off. This significantly reduces the preset time, and enables you to write in a part of the setting information!

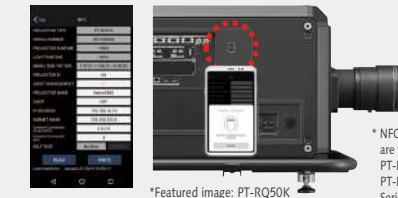


*Featured image: PT-RQ50K

* NFC function compatible projectors are the PT-RQ50K, PT-RQ35K Series, PT-RQ25K Series, PT-RE12 Series, PT-RC10 Series, and PT-MZ20K Series only.

Auto Focus Function

- The lens focus can be adjusted with the remote control or smartphone
- Automatically adjust the lens focus

Adjusting the focus is easy even after installing the projector!

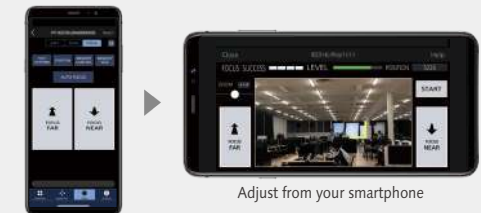

Adjust from your smartphone

Note: Auto Focus may not be compatible with some projector models and mobile devices. Please refer to the Web Manual for supported models.

See page 68 for the basic information

Smart Projector Control detail page:

>>> panasonic.net/cns/projector/download/application/smartpj/




Large-Venue

	PT-RQ25K	PT-RZ24K	PT-RQ18K	PT-RZ17K
	 <p>20,000 lm / 21,000 lm (Center)⁷ 4K⁶ * Lens sold separately.</p>	 <p>20,000 lm / 21,000 lm (Center)⁷ WUXGA * Lens sold separately.</p>	 <p>16,000 lm / 16,800 lm (Center)⁷ 4K⁶ * Lens sold separately.</p>	 <p>16,000 lm / 16,800 lm (Center)⁷ WUXGA * Lens sold separately.</p>
				
Projector type	3-Chip DLP™ Projector	3-Chip DLP™ Projector	3-Chip DLP™ Projector	3-Chip DLP™ Projector
DLP Chip	Panel size 20.3 mm (0.8 in)	Panel size 20.3 mm (0.8 in)	Panel size 20.3 mm (0.8 in)	Panel size 20.3 mm (0.8 in)
	Aspect ratio 16:10	Aspect ratio 16:10	Aspect ratio 16:10	Aspect ratio 16:10
	Number of pixels 2,304,000 (1,920 x 1,200) pixels x 3	Number of pixels 2,304,000 (1,920 x 1,200) pixels	Number of pixels 2,304,000 (1,920 x 1,200) pixels x 3	Number of pixels 2,304,000 (1,920 x 1,200) pixels
Light source	Laser diodes	Laser diodes	Laser diodes	Laser diodes
Light output	20,000 lm / 21,000 lm (Center) ⁷	20,000 lm / 21,000 lm (Center) ⁷	16,000 lm / 16,800 lm (Center) ⁷	16,000 lm / 16,800 lm (Center) ⁷
Time until light output declines to 50%¹	20,000 hours (NORMAL/QUIET)/ 24,000 hours (ECO)	20,000 hours (NORMAL/QUIET)/ 24,000 hours (ECO)	20,000 hours (NORMAL/QUIET)/ 24,000 hours (ECO)	20,000 hours (NORMAL/QUIET)/ 24,000 hours (ECO)
Resolution	4K (3,840 x 2,400)	WUXGA (1,920 x 1,200)	4K (3,840 x 2,400)	WUXGA (1,920 x 1,200)
Contrast ratio (full on/full off)	25,000:1	25,000:1	25,000:1	25,000:1
Screen size (diagonal)	1.78-25.4 m (70-1,000 in) ⁸	1.78-25.4 m (70-1,000 in) ⁸	1.78-25.4 m (70-1,000 in) ⁸	1.78-25.4 m (70-1,000 in) ⁸
Lens shift²	Vertical: ±66 % ⁹ , Horizontal: ±24 % ⁹ (powered)	Vertical: ±66 % ⁹ , Horizontal: ±24 % ⁹ (powered)	Vertical: ±66 % ⁹ , Horizontal: ±24 % ⁹ (powered)	Vertical: ±66 % ⁹ , Horizontal: ±24 % ⁹ (powered)
Filter Replacement Cycle	- (No filter)	- (No filter)	- (No filter)	- (No filter)
Terminals	HDMI in [HDMI 19-pin x 2] DisplayPort in [DP-20P x 1] Multi Projector Sync in [BNC x 1] Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN [RJ-45 x 1] USB [USB type-A x 1, for or optional Wireless Module/USB memory] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 2 A))] Slot [Slot x 1, for function boards, Intel® SDM compatible]	HDMI in [HDMI 19-pin x 2] DisplayPort in [DP-20P x 1] 3D SYNC in/out / Multi Projector Sync in [BNC x 1] 3D SYNC out / Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN [RJ-45 x 1] USB [USB type-A x 1, for or optional Wireless Module/USB memory] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 2 A))] Slot [Slot x 1, for function boards, Intel® SDM compatible]	HDMI in [HDMI 19-pin x 2] DisplayPort in [DP-20P x 1] Multi Projector Sync in [BNC x 1] Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN [RJ-45 x 1] USB [USB type-A x 1, for or optional Wireless Module/USB memory] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 2 A))] Slot [Slot x 1, for function boards, Intel® SDM compatible]	HDMI in [HDMI 19-pin x 2] DisplayPort in [DP-20P x 1] 3D SYNC in/out / Multi Projector Sync in [BNC x 1] 3D SYNC out / Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN [RJ-45 x 1] USB [USB type-A x 1, for or optional Wireless Module/USB memory] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 2 A))] Slot [Slot x 1, for function boards, Intel® SDM compatible]
Power supply	AC100 V-120 V/AC 200 V-240 V, 50 Hz/60 Hz ¹⁰	AC100 V-120 V/AC 200 V-240 V, 50 Hz/60 Hz ¹⁰	AC100 V-120 V/AC 200 V-240 V, 50 Hz/60 Hz ¹⁰	AC100 V-120 V/AC 200 V-240 V, 50 Hz/60 Hz ¹⁰
Power consumption by mode	Normal: 1.330 W Eco: 1.040 W Standby: 12 W Max: 1,490 W	Normal: 1.310 W Eco: 1.020 W Standby: 12 W Max: 1,470 W	Normal: 1.030 W Eco: 820 W Standby: 12 W Max: 1,190 W	Normal: 1.010 W Eco: 800 W Standby: 12 W Max: 1,170 W
BTU value	Max. 5,091 BTU	Max. 5,023 BTU	Max. 4,066 BTU	Max. 3,998 BTU
Operation noise	46 dB (NORMAL/QUIET), 43 dB (ECO)	46 dB (NORMAL/QUIET), 43 dB (ECO)	43 dB (NORMAL/ECO), 40 dB (QUIET)	43 dB (NORMAL/ECO), 40 dB (QUIET)
Dimensions (W x H³ x D⁴)	550 x 220 x 570 mm (21-5/8 x 8-11/16 x 22-7/16 in)	550 x 220 x 570 mm (21-5/8 x 8-11/16 x 22-7/16 in)	550 x 220 x 570 mm (21-5/8 x 8-11/16 x 22-7/16 in)	550 x 220 x 570 mm (21-5/8 x 8-11/16 x 22-7/16 in)
Weight⁵	Approx. 35.0 kg/77.2 lbs	Approx. 35.0 kg/77.2 lbs	Approx. 35.0 kg/77.2 lbs	Approx. 35.0 kg/77.2 lbs
Optional accessories	ET-PKD520H (High ceiling mount bracket) ET-PKD520S (Low ceiling mount bracket) ET-PKD521B (Attachment for ceiling mount bracket) ET-D75MKS10 (Stepping Motor kit) ET-PLF10/PLF20 (Lens Fixed Attachment) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹¹ TY-SB01QS (12G-SDI Input Board) TY-SB01DL (DIGITAL LINK Terminal Board) TY-SB01WP (Wireless Presentation System Receiver Board)	ET-PKD520H (High ceiling mount bracket) ET-PKD520S (Low ceiling mount bracket) ET-PKD521B (Attachment for ceiling mount bracket) ET-D75MKS10 (Stepping Motor kit) ET-PLF10/PLF20 (Lens Fixed Attachment) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹¹ TY-SB01QS (12G-SDI Input Board) TY-SB01DL (DIGITAL LINK Terminal Board) TY-SB01WP (Wireless Presentation System Receiver Board)	ET-PKD520H (High ceiling mount bracket) ET-PKD520S (Low ceiling mount bracket) ET-PKD521B (Attachment for ceiling mount bracket) ET-D75MKS10 (Stepping Motor kit) ET-PLF10/PLF20 (Lens Fixed Attachment) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹¹ TY-SB01QS (12G-SDI Input Board) TY-SB01DL (DIGITAL LINK Terminal Board) TY-SB01WP (Wireless Presentation System Receiver Board)	ET-PKD520H (High ceiling mount bracket) ET-PKD520S (Low ceiling mount bracket) ET-PKD521B (Attachment for ceiling mount bracket) ET-D75MKS10 (Stepping Motor kit) ET-PLF10/PLF20 (Lens Fixed Attachment) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹¹ TY-SB01QS (12G-SDI Input Board) TY-SB01DL (DIGITAL LINK Terminal Board) TY-SB01WP (Wireless Presentation System Receiver Board)
Optional lens	Yes (see the Optional Lenses page: P41)	Yes (see the Optional Lenses page: P41)	Yes (see the Optional Lenses page: P41)	Yes (see the Optional Lenses page: P41)

1: After approximately 20,000 hours, cleaning needs to be performed by the vendor which you purchased from. The light source's lifetime may be shortened due to environmental conditions and operating mode. 2: The lens shift cannot be used or its range of operation is limited with a fixed-focus lens. 3: Height: excluding the feet and protrusions. 4: Depth: protruding parts not included. 5: Average value. Each product has an individual variable in weight. 6: Resolution 3,840 x 2,400 Pixels (QUAD PIXEL DRIVE: ON)

7: Luminescence measured at center of screen. 8: 1.78-15.24 m (70-600 in) with the ET-D75LE8/D3LET80. 3.05-15.24 m (120-600 in) with the ET-D75LE95. 9: Vertical ±52 % and horizontal ±18 % with the ET-D75LE6/ET-D3LEW60. 10: The maximum light output is limited to approximately 15,000 lm. Under the following circumstances, maximum light output may be reduced. 11: Product availability may vary by country or region.

Installation

	PT-REQ12 PT-REQ12L ⁶	PT-REQ10 PT-REQ10L ⁶	PT-REQ80 PT-REQ80L ⁶																		
	 <p>12,000 lm / 12,400 lm (Center)⁷ 4K * Available in black/white cabinet.</p>	 <p>10,000 lm / 10,300 lm (Center)⁷ 4K * Available in black/white cabinet.</p>	 <p>8,000 lm / 8,200 lm (Center)⁷ 4K * Available in black/white cabinet.</p>																		
Projector type	1-Chip DLP™ Projector	1-Chip DLP™ Projector	1-Chip DLP™ Projector																		
DLP chip	<table border="1"> <tr> <td>Panel size</td> <td>20.3 mm (0.8 in)</td> </tr> <tr> <td>Aspect ratio</td> <td>16:10</td> </tr> <tr> <td>Number of pixels</td> <td>2,304,000 (1,920 x 1,200) pixels</td> </tr> </table>	Panel size	20.3 mm (0.8 in)	Aspect ratio	16:10	Number of pixels	2,304,000 (1,920 x 1,200) pixels	<table border="1"> <tr> <td>Panel size</td> <td>20.3 mm (0.8 in)</td> </tr> <tr> <td>Aspect ratio</td> <td>16:10</td> </tr> <tr> <td>Number of pixels</td> <td>2,304,000 (1,920 x 1,200) pixels</td> </tr> </table>	Panel size	20.3 mm (0.8 in)	Aspect ratio	16:10	Number of pixels	2,304,000 (1,920 x 1,200) pixels	<table border="1"> <tr> <td>Panel size</td> <td>20.3 mm (0.8 in)</td> </tr> <tr> <td>Aspect ratio</td> <td>16:10</td> </tr> <tr> <td>Number of pixels</td> <td>2,304,000 (1,920 x 1,200) pixels</td> </tr> </table>	Panel size	20.3 mm (0.8 in)	Aspect ratio	16:10	Number of pixels	2,304,000 (1,920 x 1,200) pixels
Panel size	20.3 mm (0.8 in)																				
Aspect ratio	16:10																				
Number of pixels	2,304,000 (1,920 x 1,200) pixels																				
Panel size	20.3 mm (0.8 in)																				
Aspect ratio	16:10																				
Number of pixels	2,304,000 (1,920 x 1,200) pixels																				
Panel size	20.3 mm (0.8 in)																				
Aspect ratio	16:10																				
Number of pixels	2,304,000 (1,920 x 1,200) pixels																				
Light source	Laser diode	Laser diode	Laser diode																		
Light output	12,000 lm / 12,400 lm (Center) ⁷	10,000 lm / 10,300 lm (Center) ⁷	8,000 lm / 8,200 lm (Center) ⁷																		
Time until light output declines to 50%¹	20,000 hours (NORMAL)/ 24,000 hours (ECO)	20,000 hours (NORMAL)/ 24,000 hours (ECO)	20,000 hours (NORMAL)/ 24,000 hours (ECO)																		
Resolution	4K (3,840 x 2,400) ⁸	4K (3,840 x 2,400) ⁸	4K (3,840 x 2,400) ⁸																		
Contrast ratio (full on/full off)	25,000:1	25,000:1	25,000:1																		
Screen size (diagonal)	1.78-17.8 m (70-700 in) ⁹	1.78-17.8 m (70-700 in) ⁹	1.78-17.8 m (70-700 in) ⁹																		
Lens (throw ratio)	F 1.84-2.31, f 23.9-37.2 mm (1.36-2.10:1) (PT-REQ12)	F 1.84-2.31, f 23.9-37.2 mm (1.36-2.10:1) (PT-REQ10)	F 1.84-2.31, f 23.9-37.2 mm (1.36-2.10:1) (PT-REQ80)																		
Lens shift²	Vertical: ±60 % ¹⁰ , Horizontal: ±29 % ¹¹ (powered)	Vertical: ±60 % ¹⁰ , Horizontal: ±29 % ¹¹ (powered)	Vertical: ±60 % ¹⁰ , Horizontal: ±29 % ¹¹ (powered)																		
Filter Replacement Cycle	- (No filter)	- (No filter)	- (No filter)																		
Terminals	HDMI™ 1 in/2 in [HDMI™ 19-pin x 2] DisplayPort in [DP-20P x 1] Multi Projector Sync in [BNC x 1] Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] Remote out [M3 x 1] LAN [RJ-45 x 1] USB [USB type-A x 1] DC OUT [USB type-A x 1] Slot [for function boards (optional) x 1]	HDMI™ 1 in/2 in [HDMI™ 19-pin x 2] DisplayPort in [DP-20P x 1] Multi Projector Sync in [BNC x 1] Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] Remote out [M3 x 1] LAN [RJ-45 x 1] USB [USB type-A x 1] DC OUT [USB type-A x 1] Slot [for function boards (optional) x 1]	HDMI™ 1 in/2 in [HDMI™ 19-pin x 2] DisplayPort in [DP-20P x 1] Multi Projector Sync in [BNC x 1] Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] Remote out [M3 x 1] LAN [RJ-45 x 1] USB [USB type-A x 1] DC OUT [USB type-A x 1] Slot [for function boards (optional) x 1]																		
Power supply	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz																		
Power consumption by mode	Normal: 840 W Eco: 655 W Standby: 12 W Max: 1,030 W	Normal: 695 W Eco: 545 W Standby: 12 W Max: 870 W	Normal: 575 W Eco: 455 W Standby: 12 W Max: 760 W																		
BTU value	Max. 3,515 BTU	Max. 2,970 BTU	Max. 2,594 BTU																		
Operation noise	38 dB (NORMAL/ECO), 35 dB (QUIET)	36 dB (NORMAL/ECO), 33 dB (QUIET)	35 dB (NORMAL/ECO), 32 dB (QUIET)																		
Dimensions (W x H³ x D⁴)	498 x 212 x 648 mm (19-19/32 x 8-11/32 x 25-1/2 in)	498 x 212 x 648 mm (19-19/32 x 8-11/32 x 25-1/2 in)	498 x 212 x 648 mm (19-19/32 x 8-11/32 x 25-1/2 in)																		
Weight⁵	Approx. 28.7 kg/63.3 lbs (27.0 kg/59.5 lbs ⁶)	Approx. 28.7 kg/63.3 lbs (27.0 kg/59.5 lbs ⁶)	Approx. 28.7 kg/63.3 lbs (27.0 kg/59.5 lbs ⁶)																		
Optional accessories	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹² ET-NUK10 [NFC Upgrade Kit] ¹² ET-UK20 (Geometry Manager Pro Upgrade kit) ET-CUK10/CUK10P (Auto Screen Adjustment Upgrade Kit) TY-SB01QS (12G-SDI Terminal Board) TY-SB01DL (DIGITAL LINK Terminal Board) TY-SB01WP (Wireless Presentation System Receiver Board)	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹² ET-NUK10 [NFC Upgrade Kit] ¹² ET-UK20 (Geometry Manager Pro Upgrade kit) ET-CUK10/CUK10P (Auto Screen Adjustment Upgrade Kit) TY-SB01QS (12G-SDI Terminal Board) TY-SB01DL (DIGITAL LINK Terminal Board) TY-SB01WP (Wireless Presentation System Receiver Board)	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹² ET-NUK10 [NFC Upgrade Kit] ¹² ET-UK20 (Geometry Manager Pro Upgrade kit) ET-CUK10/CUK10P (Auto Screen Adjustment Upgrade Kit) TY-SB01QS (12G-SDI Terminal Board) TY-SB01DL (DIGITAL LINK Terminal Board) TY-SB01WP (Wireless Presentation System Receiver Board)																		
Optional lens	Yes (see the Optional Lenses page: P43)	Yes (see the Optional Lenses page: P43)	Yes (see the Optional Lenses page: P43)																		

1: After approximately 20,000 hours, cleaning needs to be performed (by the vendor which you purchased from). The light source's lifetime may be shortened due to environmental conditions and operating mode. 2: The lens shift cannot be used with a fixed-focus lens. 3: Height: with legs at shortest position. 4: Depth: including the supplied lens. Depth: 538 mm (21-3/16 in) for the lens-less models. 5: Average value. Each product has an individual variable in weight. 6: Lens-less model.

7: Luminance measured at center of screen. 8: With Quad Pixel Drive: ON. 9: With the supplied lens (ET-C1S600). 10: Vertical ±50 % with the ET-C1W300/C1U100. 11: Horizontal ±23 % with the ET-C1W300/C1U100. 12: Product availability may vary by country or region. To use NFC function, Smart Projector Control App is required.

Geometric Adjustment with Free Grid Correction

FEATURES




Geometric Adjustment is a suite of built-in functions operated via the projector remote control that correct distortion when images are projected at an angle, onto curved screens, uneven surfaces, or over wall obstructions. Correction extends to spherical, cylindrical, and other complex screen shapes without need of a connected PC.

Maintain Aspect Ratio and independent Corner Adjustment functions simplify correction while the ability to save image-adjustment data is invaluable whenever correction settings needs to be disabled and reapplied, and for saving work progress.

Free Grid Correction

Free Grid simplifies operation of Geometric Adjustment. Using only the projector remote control, installers can correct image distortion caused by uneven surfaces or irregular objects on flat or curved screens. A grid is overlaid on the projected image, allowing users to reshape distorted areas by adjusting the position of node or V/H line control-points. Grids of between 2 x 2 and 17 x 17 lines are selectable according to required granularity, and work progress is saved automatically so you can move freely between grid resolutions. Free Grid approaches the precision and convenience of software-based solutions in situations where PC connection isn't practical.

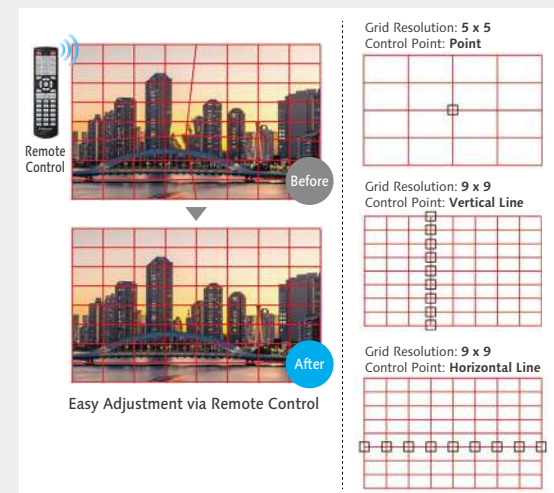

Note: For Geometric Adjustment-ready models, see page 69.

Installation

PT-REZ12 **NEW** **SOLID SHINE LASER**
PT-REZ12L⁶ **ACCEPTS 4K**



12,000 lm / 12,400 lm (Center)⁷ | WUXGA
* Available in black/white cabinet.



PT-REZ10 **NEW** **SOLID SHINE LASER**
PT-REZ10L⁶ **ACCEPTS 4K**



10,000 lm / 10,300 lm (Center)⁷ | WUXGA
* Available in black/white cabinet.



PT-REZ80 **NEW** **SOLID SHINE LASER**
PT-REZ80L⁶ **ACCEPTS 4K**



8,000 lm / 8,200 lm (Center)⁷ | WUXGA
* Available in black/white cabinet.



PT-RCQ10 **SOLID SHINE LASER**
PT-RCQ10L⁶ **ACCEPTS 4K**



10,000 lm / 10,500 lm (Center)⁷ | 2715 x 1697 dots
* Available in black/white cabinet.



PT-RCQ80 **SOLID SHINE LASER**
PT-RCQ80L⁶ **ACCEPTS 4K**



8,000 lm / 8,400 lm (Center)⁷ | 2715 x 1697 dots
* Available in black/white cabinet.



Projector type	1-Chip DLP™ Projector	1-Chip DLP™ Projector	1-Chip DLP™ Projector	1-Chip DLP™ Projector	1-Chip DLP™ Projector
DLP chip	Panel size 20.3 mm (0.8 in)	Panel size 20.3 mm (0.8 in)	Panel size 20.3 mm (0.8 in)	Panel size 20.3 mm (0.8 in)	Panel size 17.0 mm (0.67 in)
Aspect ratio	16:10	16:10	16:10	16:10	16:10
Number of pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels
Light source	Laser diode	Laser diode	Laser diode	Laser diode	Laser diode
Light output	12,000 lm / 12,400 lm (Center) ⁷	10,000 lm / 10,300 lm (Center) ⁷	8,000 lm / 8,200 lm (Center) ⁷	10,000 lm / 10,500 lm (Center) ⁷	8,000 lm / 8,400 lm (Center) ⁷
Time until light output declines to 50%¹	20,000 hours (NORMAL)/ 24,000 hours (ECO)	20,000 hours (NORMAL)/ 24,000 hours (ECO)	20,000 hours (NORMAL)/ 24,000 hours (ECO)	20,000 hours (NORMAL)/ 24,000 hours (ECO)	20,000 hours (NORMAL)/ 24,000 hours (ECO)
Resolution	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)	4,608,000 (2,715 x 1,697) dots ¹¹
Contrast ratio (full on/full off)	20,000:1	20,000:1	20,000:1	20,000:1	10,000:1
Screen size (diagonal)	1.78-17.8 m (70-700 in)	1.78-17.8 m (70-700 in)	1.78-17.8 m (70-700 in)	1.27-15.24 m (50-600 in) ¹²	1.27-15.24 m (50-600 in) ¹²
Lens (throw ratio)	F 1.84-2.31, f 23.9-37.2 mm (1.36-2.10:1) (PT-REZ12)	F 1.84-2.31, f 23.9-37.2 mm (1.36-2.10:1) (PT-REZ10)	F 1.84-2.31, f 23.9-37.2 mm (1.36-2.10:1) (PT-REZ80)	F 1.7-1.9, f 25.6-35.7 mm (1.71-2.41:1) (PT-RCQ10)	F 1.7-1.9, f 25.6-35.7 mm (1.71-2.41:1) (PT-RCQ80)
Lens shift²	Vertical: ±60 % ⁸ , Horizontal: ±29 % ⁹ (powered)	Vertical: ±60 % ⁸ , Horizontal: ±29 % ⁹ (powered)	Vertical: ±60 % ⁸ , Horizontal: ±29 % ⁹ (powered)	Vertical: +50 %/-16 % ⁸ , Horizontal: +30 %/-10 % ⁹ (powered)	Vertical: +50 %/-16 % ⁸ , Horizontal: +30 %/-10 % ⁹ (powered)
Filter Replacement Cycle	- (No filter)	- (No filter)	- (No filter)	- (No filter)	- (No filter)
Terminals	HDMI™ 1 in/2 in [HDMI™ 19-pin x 2] DisplayPort in [DP-20P x 1] Multi Projector Sync in [BNC x 1] Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] Remote out [M3 x 1] LAN [RJ-45 x 1] USB [USB type-A x 1] DC OUT [USB type-A x 1] Slot [for function boards (optional) x 1]	HDMI™ 1 in/2 in [HDMI™ 19-pin x 2] DisplayPort in [DP-20P x 1] Multi Projector Sync in [BNC x 1] Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] Remote out [M3 x 1] LAN [RJ-45 x 1] USB [USB type-A x 1] DC OUT [USB type-A x 1] Slot [for function boards (optional) x 1]	HDMI™ 1 in/2 in [HDMI™ 19-pin x 2] DisplayPort in [DP-20P x 1] Multi Projector Sync in [BNC x 1] Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] Remote out [M3 x 1] LAN [RJ-45 x 1] USB [USB type-A x 1] DC OUT [USB type-A x 1] Slot [for function boards (optional) x 1]	SDI in [BNC x 1 (3G/HD-SDI)] HDMI in [HDMI 19-pin x 1] DVI-D in [DVI-D 24-pin x 1] Multi Projector Sync out [BNC x 1] Multi Projector Sync in [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 1] USB [USB type-A x 1] Slot [Vacant for compatible SLOT NX boards (optional)]	SDI in [BNC x 1 (3G/HD-SDI)] HDMI in [HDMI 19-pin x 1] DVI-D in [DVI-D 24-pin x 1] Multi Projector Sync in [BNC x 1] Multi Projector Sync out [BNC x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Serial out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 1] USB [USB type-A x 1] Slot [Vacant for compatible SLOT NX boards (optional)]
Power supply	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz
Power consumption by mode	Normal: 810 W Eco: 625 W Standby: 12 W Max: 995 W	Normal: 675 W Eco: 525 W Standby: 12 W Max: 840 W	Normal: 540 W Eco: 425 W Standby: 12 W Max: 730 W	Normal: 990 W Eco: 780 W Standby: 8 W Max: 1,100 W	Normal: 770 W Eco: 590 W Standby: 8 W Max: 880 W
BTU value	Max. 3,395 BTU	Max. 2,866 BTU	Max. 2,491 BTU	Max. 3,754 BTU	Max. 3,003 BTU
Operation noise	38 dB (NORMAL/ECO), 35 dB (QUIET)	36 dB (NORMAL/ECO), 33 dB (QUIET)	35 dB (NORMAL/ECO), 32 dB (QUIET)	43 dB (NORMAL)/40 dB (QUIET1)/38 dB (QUIET2)	40 dB (NORMAL)/38 dB (QUIET)
Dimensions (W x H³ x D⁴)	498 x 212 x 648 mm (19-19/32 x 8-11/32 x 21-3/16 in)	498 x 212 x 648 mm (19-19/32 x 8-11/32 x 21-3/16 in)	498 x 212 x 648 mm (19-19/32 x 8-11/32 x 21-3/16 in)	498 x 200 x 581 mm (19-19/32 x 7-7/8 x 22-7/8 in)	498 x 200 x 581 mm (19-19/32 x 7-7/8 x 22-7/8 in)
Weight⁵	Approx. 28.7 kg/63.3 lbs (27.0 kg/59.5 lbs ⁶)	Approx. 28.7 kg/63.3 lbs (27.0 kg/59.5 lbs ⁶)	Approx. 28.7 kg/63.3 lbs (27.0 kg/59.5 lbs ⁶)	Approx. 24.2 kg/53.4 lbs (23.4 kg/51.6 lbs ⁶)	Approx. 24.2 kg/53.4 lbs (23.4 kg/51.6 lbs ⁶)
Optional accessories	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹⁰ ET-NUK10 [NFC Upgrade Kit] ¹⁰ ET-UK20 (Geometry Manager Pro Upgrade kit) ET-CUK10/CUK10P (Auto Screen Adjustment Upgrade Kit) TY-SB01QS (12G-SDI Terminal Board) TY-SB01DL (DIGITAL LINK Terminal Board) TY-SB01WP (Wireless Presentation System Receiver Board)	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹⁰ ET-NUK10 [NFC Upgrade Kit] ¹⁰ ET-UK20 (Geometry Manager Pro Upgrade kit) ET-CUK10/CUK10P (Auto Screen Adjustment Upgrade Kit) TY-SB01QS (12G-SDI Terminal Board) TY-SB01DL (DIGITAL LINK Terminal Board) TY-SB01WP (Wireless Presentation System Receiver Board)	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹⁰ ET-NUK10 [NFC Upgrade Kit] ¹⁰ ET-UK20 (Geometry Manager Pro Upgrade kit) ET-CUK10/CUK10P (Auto Screen Adjustment Upgrade Kit) TY-SB01QS (12G-SDI Terminal Board) TY-SB01DL (DIGITAL LINK Terminal Board) TY-SB01WP (Wireless Presentation System Receiver Board)	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹⁰ ET-UK20 (Geometry Manager Pro Upgrade kit) ET-CUK10/CUK10P (Auto Screen Adjustment Upgrade Kit) ET-NUK10 (NFC Upgrade Kit) ¹⁰ ET-MDNV10 (DVI-D Input Board) ET-MDNH10 (HDMI Input Board) ET-MDN12G10 (12G-SDI Input Board) ET-MDNDP10 (DisplayPort Input Board) ET-MDNFB10 (12G-SDI Optical Input Board)	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ¹⁰ ET-UK20 (Geometry Manager Pro Upgrade kit) ET-CUK10/CUK10P (Auto Screen Adjustment Upgrade Kit) ET-NUK10 (NFC Upgrade Kit) ¹⁰ ET-MDNV10 (DVI-D Input Board) ET-MDNH10 (HDMI Input Board) ET-MDN12G10 (12G-SDI Input Board) ET-MDNDP10 (DisplayPort Input Board) ET-MDNFB10 (12G-SDI Optical Input Board)
Optional lens	Yes (see the Optional Lenses page: P43)	Yes (see the Optional Lenses page: P43)	Yes (see the Optional Lenses page: P43)	Yes (see the Optional Lenses page: P45)	Yes (see the Optional Lenses page: P45)

1: After approximately 20,000 hours, cleaning needs to be performed (by the vendor which you purchased from). The light source's lifetime may be shortened due to environmental conditions and operating mode. 2: The lens shift cannot be used with a fixed-focus lens. 3: Height: with legs at shortest position. 4: Depth: including the supplied lens. Depth: 538 mm (21-3/16 in) for the lens-less models.
5: Average value. Each product has an individual variable in weight. 6: Lens-less model.

7: Luminance measured at center of screen. 8: Vertical +40 %/-16 % with the ET-DLE060. 9: Horizontal +10 %/-20 % with the ET-DLE020, +19 %/-10 % with the ET-DLE060, +28 %/-10 % with the ET-DLE105/ET-DLE085. 10: Product availability may vary by country or region. To use NFC function, Smart Projector Control App is required. 11: With Smooth Pixel Drive. ON. 12: 1.27-5.08 m (50-200 in) with the ET-DLE055. 2.54-10.16 m (100-400 in) with the ET-DLE020. 2.54-8.89 m (100-350 in) with the ET-DLE035.

Installation

PT-RZ120 PT-RZ120L⁶



12,000 lm / 12,600 lm (Center)⁷ | WUXGA
* Available in black/white cabinet.



PT-RZ790 PT-RZ790L⁶



7,000 lm / 7,200 lm (Center)⁷ | WUXGA
* Available in black/white cabinet.



PT-RZ690 PT-RZ690L⁶



6,000 lm / 6,200 lm (Center)⁷ | WUXGA
* Available in black/white cabinet.




























Projector type	1-Chip DLP™ Projector	1-Chip DLP™ Projector	1-Chip DLP™ Projector
DLP chip	Panel size	17.0 mm (0.67 in)	17.0 mm (0.67 in)
	Aspect ratio	16:10	16:10
Light source	Number of pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels
	Laser diode	Laser diode	Laser diode
Light output	12,000 lm / 12,600 lm (Center) ⁷	7,000 lm / 7,200 lm (Center) ⁷	6,000 lm / 6,200 lm (Center) ⁷
Time until light output declines to 50%¹	20,000 hours (NORMAL)/ 24,000 hours (ECO)	20,000 hours (NORMAL)/ 24,000 hours (ECO)	20,000 hours (NORMAL)/ 24,000 hours (ECO)
Resolution	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)
Contrast ratio (full on/full off)	10,000:1	10,000:1	10,000:1
Screen size (diagonal)	1.27-15.24 m (50-600 in) ⁹	1.27-15.24 m (50-600 in) ⁹	1.27-15.24 m (50-600 in) ⁹
Lens (throw ratio)	F 1.7-1.9, f 25.6-35.7 mm (1.71-2.41:1) (PT-RZ120)	F 1.7-1.9, f 25.6-35.7 mm (1.71-2.41:1) (PT-RZ790)	F 1.7-1.9, f 25.6-35.7 mm (1.71-2.41:1) (PT-RZ690)
Lens shift²	Vertical: +50 %/-16 % ¹⁰ , Horizontal: +30 %/-10 % ¹¹ (powered)	Vertical: +50 %/-16 % ¹⁰ , Horizontal: +30 %/-10 % ¹² (powered)	Vertical: +50 %/-16 % ¹⁰ , Horizontal: +30 %/-10 % ¹² (powered)
Filter Replacement Cycle	- (No filter)	- (No filter)	- (No filter)
Terminals	SDI in [BNC x 1 (3G/HD/SD-SDI)] HDMI in [HDMI 19-pin x 1] DVI-D in [DVI-D 24-pin x 1] RGB 1 in [BNC x 5] RGB 2 in [D-sub HD 15-pin x 1] Serial/Multi Projector Sync in [D-sub 9-pin x 1 (RS-232C)] Serial/Multi Projector Sync out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 1] LAN [RJ-45 x 1]	SDI in [BNC x 1 (3G/HD/SD-SDI)] HDMI in [HDMI 19-pin x 1] DVI-D in [DVI-D 24-pin x 1] RGB 1 in [BNC x 5] RGB 2 in [D-sub HD 15-pin x 1] Serial/Multi Projector Sync in [D-sub 9-pin x 1 (RS-232C)] Serial/Multi Projector Sync out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 1] LAN [RJ-45 x 1]	SDI in [BNC x 1 (3G/HD/SD-SDI)] HDMI in [HDMI 19-pin x 1] DVI-D in [DVI-D 24-pin x 1] RGB 1 in [BNC x 5] RGB 2 in [D-sub HD 15-pin x 1] Serial/Multi Projector Sync in [D-sub 9-pin x 1 (RS-232C)] Serial/Multi Projector Sync out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in/out [M3 x 2] Remote 2 in [D-sub 9-pin x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 1] LAN [RJ-45 x 1]
Power supply	100-240 V AC, 11.0-4.5 A, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz
Power consumption by mode	Normal: 730 W Eco: 590 W Standby: 7 W Max: 1,100 W	Normal: 545 W Eco: 435 W Standby: 7 W Max: 630 W	Normal: 490 W Eco: 395 W Standby: 7 W Max: 565 W
BTU value	Max. 3,754 BTU	Max. 2,151 BTU	Max. 1,929 BTU
Operation noise	44 dB (NORMAL)/41 dB (QUIET1)/ 38 dB (QUIET2)	36 dB (NORMAL)/35 dB (QUIET)	36 dB (NORMAL)/35 dB (QUIET)
Dimensions (W x H³ x D⁴)	498 x 200 x 581 mm (19-19/32 x 7-7/8 x 22-7/8 in)	498 x 200 x 581 mm (19-19/32 x 7-7/8 x 22-7/8 in)	498 x 200 x 581 mm (19-19/32 x 7-7/8 x 22-7/8 in)
Weight⁵	Approx. 23.6 kg/51.9 lbs (22.8 kg/50.2 lbs ⁶)	Approx. 22.1 kg/48.7 lbs (21.3 kg/47.0 lbs ⁶)	Approx. 22.1 kg/48.7 lbs (21.3 kg/47.0 lbs ⁶)
Optional accessories	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-UK20 (Geometry Manager Pro Upgrade kit) ET-CUK10/CUK10P (Auto Screen Adjustment Upgrade Kit)	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-UK20 (Geometry Manager Pro Upgrade kit) ET-CUK10/CUK10P (Auto Screen Adjustment Upgrade Kit)	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-UK20 (Geometry Manager Pro Upgrade kit) ET-CUK10/CUK10P (Auto Screen Adjustment Upgrade Kit)
Optional lens	Yes (see the Optional Lenses page: P45)	Yes (see the Optional Lenses page: P45)	Yes (see the Optional Lenses page: P45)

1: After approximately 20,000 hours, cleaning needs to be performed (by the vendor which you purchased from). The light source's lifetime may be shortened due to environmental conditions and operating mode. 2: The lens shift cannot be used with a fixed-focus lens. 3: Height: with legs at shortest position. 4: Depth: including the supplied lens. Depth: 538 mm (21-3/16 in) for the lens-less models. 5: Average value. Each product has an individual variable in weight. 6: Lens-less model. 7: Luminance measured at center of screen. 8: HDMI/DIGITAL LINK input only.

9: 1.27-5.08 m (50-200 in) with the ET-DLE055. 2.54-10.16 m (100-400 in) with the ET-DLE020. 2.54-8.89 m (100-350 in) with the ET-DLE035. 10: Vertical +40 %/-16 % with the ET-DLE060. 11: Horizontal +10 %/-20 % with the ET-DLE020, +19 %/-10 % with the ET-DLE060, +28 %/-10 % with the ET-DLE105/ET-DLE085. 12: Horizontal +19 %/-10 % with the ET-DLE060, +28 %/-10 % with the ET-DLE085/ET-DLE105. ical ±44 % and horizontal ±15 % with the ET-D75LE6/ET-D3LE6W0.









Installation

		PT-FRQ60	PT-FRQ50	PT-FRZ60 ⁷	PT-FRZ50 ⁷	PT-FRZ55 ⁷
						
		6,000 lm / 6,200 lm (Center) ⁶ 4K ⁵ * Available in black/white cabinet.	5,200 lm / 5,400 lm (Center) ⁶ 4K ⁵ * Available in black/white cabinet.	6,000 lm / 6,200 lm (Center) ⁶ WUXGA * Available in black/white cabinet.	5,200 lm / 5,400 lm (Center) ⁶ WUXGA * Available in black/white cabinet.	5,000 lm / 5,200 lm (Center) ⁶ WUXGA * Available in black/white cabinet.
		   	   	   	   	   
Projector type		1-Chip DLP™ Projector	1-Chip DLP™ Projector	1-Chip DLP™ Projector	1-Chip DLP™ Projector	1-Chip DLP™ Projector
DLP chip	Panel size	16.5 mm (0.65 in)	16.5 mm (0.65 in)	17.0 mm (0.67 in)	17.0 mm (0.67 in)	17.0 mm (0.67 in)
	Aspect ratio	16:9	16:9	16:10	16:10	16:10
	Number of pixels	2,073,600 (1,920 x 1,080 pixels)	2,073,600 (1,920 x 1,080 pixels)	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels
	Light source	Laser diode	Laser diode	Laser diode	Laser diode	Laser diode
Light output	6,000 lm / 6,200 lm (Center) ⁶	5,200 lm / 5,400 lm (Center) ⁶	6,000 lm / 6,200 lm (Center) ⁶	5,200 lm / 5,400 lm (Center) ⁶	5,000 lm / 5,200 lm (Center) ⁶	
Time until light output declines to 50%¹	20,000 hours (NORMAL)/ 24,000 hours (ECO)/ 20,000 hours (QUIET)	20,000 hours (NORMAL)/ 24,000 hours (ECO)/ 20,000 hours (QUIET)	20,000 hours (NORMAL)/ 24,000 hours (ECO)/ 20,000 hours (QUIET)	20,000 hours (NORMAL)/ 24,000 hours (ECO)/ 20,000 hours (QUIET)	20,000 hours (NORMAL)/ 24,000 hours (ECO)/ 20,000 hours (QUIET)	20,000 hours (NORMAL)/24,000 hours (ECO)/ 20,000 hours (QUIET)/43,000 hours (LONG LIFE1)/ 61,000 hours (LONG LIFE2)/87,000 hours (LONG LIFE3)
Resolution	4K (3,840 x 2,160)	4K (3,840 x 2,160)	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)	
Contrast ratio (full on/full off)	20,000:1	20,000:1	20,000:1	20,000:1	20,000:1	
Screen size (diagonal)	1.02-7.62 m (40-300 in)	1.02-7.62 m (40-300 in)	1.02-7.62 m (40-300 in)	1.02-7.62 m (40-300 in)	1.02-7.62 m (40-300 in)	
Lens (throw ratio)	F 2.0-3.4, f 21.5-43.0 mm (1.46-2.93:1)	F 2.0-3.4, f 21.5-43.0 mm (1.46-2.93:1)	F 2.0-3.4, f 21.5-43.0 mm (1.46-2.94:1)	F 2.0-3.4, f 21.5-43.0 mm (1.46-2.94:1)	Fixed zoom/Auto Focus Lenses (Short throw) (0.8:1)	
Lens shift²	Vertical: +71 %/-48 %, Horizontal: +34 %/-27 % (manual)	Vertical: +71 %/-48 %, Horizontal: +34 %/-27 % (manual)	Vertical: +64 %/-44 %, Horizontal: +34 %/-27 % (manual)	Vertical: +64 %/-44 %, Horizontal: +34 %/-27 % (manual)	Vertical: ±4.4 %, Horizontal: ±2.1 % (powered)	
Filter Replacement Cycle	- (No filter)	- (No filter)	- (No filter)	- (No filter)	- (No filter)	
Terminals	HDMI in 1/2 [HDMI 19-pin x 2] Computer in [D-sub HD 15-pin x 1] Monitor out [D-sub HD 15-pin x 1] Audio in [M3 x 1] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 1] USB (DC OUT) [USB type-A x 1]	HDMI in 1/2 [HDMI 19-pin x 2] Computer in [D-sub HD 15-pin x 1] Monitor out [D-sub HD 15-pin x 1] Audio in [M3 x 1] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 1] USB (DC OUT) [USB type-A x 1]	Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] HDMI 1/2 in [HDMI 19-pin x 2] Video in [Pin jack x 1] Audio in 1 [Pin jack x 2 (L, R)] Audio in 2/3 [M3 x 2] Variable audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 1] DC OUT [USB type-A x 1]	Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] HDMI 1/2 in [HDMI 19-pin x 2] Video in [Pin jack x 1] Audio in 1 [Pin jack x 2 (L, R)] Audio in 2/3 [M3 x 2] Variable audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 1] DC OUT [USB type-A x 1]	Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] HDMI 1/2 in [HDMI 19-pin x 2] Video in [Pin jack x 1] Audio in 1 [Pin jack x 2 (L, R)] Audio in 2/3 [M3 x 2] Variable audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK/Art-net [RJ-45 x 1] DC OUT [USB type-A x 1]	
Power supply	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	
Power consumption by mode	Normal: 445 W Eco: 355 W Standby: 15 W Max: 505 W	Normal: 420 W Eco: 330 W Standby: 15 W Max: 480 W	Normal: 490 W Eco: 385 W Standby: 10 W Max: 540 W	Normal: 370 W Eco: 295 W Standby: 10 W Max: 465 W	Normal: 370 W Eco: 295 W Standby: 10 W Max: 465 W	
BTU value	Max. 1,775 BTU	Max. 1,640 BTU	Max. 1,843 BTU	Max. 1,587 BTU	Max. 1,587 BTU	
Operation noise	36 dB (NORMAL/ECO)/31 dB (QUIET)	35 dB (NORMAL/ECO)/28 dB (QUIET)	35 dB (NORMAL)/30 dB (QUIET)	32 dB (NORMAL)/27 dB (QUIET)	32 dB (NORMAL)/27 dB (QUIET)	
Dimensions (W x H³ x D)	498 x 168 x 492 mm (19-5/8 x 6-5/8 x 19-3/8 in)	498 x 168 x 492 mm (19-5/8 x 6-5/8 x 19-3/8 in)	498 x 168 x 492 mm (19-5/8 x 6-5/8 x 19-3/8 in)	498 x 168 x 492 mm (19-5/8 x 6-5/8 x 19-3/8 in)	498 x 168 x 481 mm (19-5/8 x 6-5/8 x 18-15/16 in)	
Weight⁴	Approx. 16.4 kg/36.2 lbs	Approx. 16.1 kg/35.5 lbs	Approx. 16.1 kg/35.5 lbs	Approx. 16.0 kg/35.3 lbs	Approx. 16.4 kg/36.2 lbs	
Optional accessories	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ⁷ TY-WPS1 (Wireless Presentation System)	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ⁷ TY-WPS1 (Wireless Presentation System)	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-ADSV (D-sub/S-VIDEO Conversion Cable)	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-ADSV (D-sub/S-VIDEO Conversion Cable)	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKD130B (Attachment for ceiling mount bracket) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-ADSV (D-sub/S-VIDEO Conversion Cable)	
Optional lens	-	-	-	-	-	

1: After approximately 20,000 hours, cleaning needs to be performed (by the vendor which you purchased from). The light source's lifetime may be shortened due to environmental conditions and operating mode. 2: The lens shift cannot be used with a fixed-focus lens. 3: Height: with legs at shortest position. 4: Average value. Each product has an individual variable in weight.

5: Resolution 3,840 x 2,160 Pixels (with Quad Pixel Drive) 6: Luminance measured at center of screen. 7: The availability varies depending on the country. 8: HDMI/DIGITAL LINK input only.







Installation

		PT-MZ20KL	PT-MZ17KL	PT-MZ14KL	PT-MZ11KL
		 <p>20,000 lm WUXGA</p> <p>* Lens sold separately.* Available in black/white cabinet.</p> 	 <p>16,500 lm WUXGA</p> <p>* Lens sold separately.* Available in black/white cabinet.</p> 	 <p>14,000 lm WUXGA</p> <p>* Lens sold separately.* Available in black/white cabinet.</p> 	 <p>11,000 lm WUXGA</p> <p>* Lens sold separately.* Available in black/white cabinet.</p> 
Projector type		LCD Projector	LCD Projector	LCD Projector	LCD Projector
LCD panel	Panel size	25.4 mm (1.0 in)	25.4 mm (1.0 in)	25.4 mm (1.0 in)	25.4 mm (1.0 in)
	Aspect ratio	16:10	16:10	16:10	16:10
	Number of pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels
Light source		Laser diode	Laser diode	Laser diode	Laser diode
Light output		20,000 lm	16,500 lm	14,000 lm	11,000 lm
Time until light output declines to 50%¹		20,000 hours (NORMAL/QUIET)	20,000 hours (NORMAL/QUIET)	20,000 hours (NORMAL/QUIET)	20,000 hours (NORMAL/QUIET)
Resolution		WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)
Contrast ratio (full on/full off)		3,000,000:1	3,000,000:1	3,000,000:1	3,000,000:1
Screen size (diagonal)		2.03-15.24 m (80-600 in) ⁷	2.03-15.24 m (80-600 in) ¹⁰	2.03-15.24 m (80-600 in) ¹⁰	2.03-15.24 m (80-600 in) ¹⁰
Lens (throw ratio)		Optional zoom lens	Optional zoom lens	Optional zoom lens	Optional zoom lens
Lens shift²		Vertical: ±60 % ⁸ , Horizontal: ±20 % ⁸ (powered)	Vertical: ±60 % ⁸ , Horizontal: ±20 % ⁸ (powered)	Vertical: ±60 % ⁸ , Horizontal: ±20 % ⁸ (powered)	Vertical: ±60 % ⁸ , Horizontal: ±20 % ⁸ (powered)
Filter Replacement Cycle		20,000 hours	20,000 hours	20,000 hours	20,000 hours
Terminals		SDI in [BNC x 1 (3G/HD-SDI)] HDMI in [HDMI 19-pin x 2] Serial/Multi Projector Sync in [D-sub 9-pin x 1 (RS-232C)] Serial/Multi Projector Sync out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [D-sub 9-pin x 1] Remote 2 in [M3 x 1] Remote out [M3 x 1] LAN [RJ-45 x 1] DIGITAL LINK/Art-net [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 2 A))] USB [USB type A x 1 (for optional AJ-WM50 Series Wireless Module, for USB memory)]	SDI in [BNC x 1 (3G/HD-SDI)] HDMI in [HDMI 19-pin x 2] Serial/Multi Projector Sync in [D-sub 9-pin x 1 (RS-232C)] Serial/Multi Projector Sync out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [D-sub 9-pin x 1] Remote 2 in [M3 x 1] Remote out [M3 x 1] LAN [RJ-45 x 1] DIGITAL LINK/Art-net [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 2 A))] USB [USB type A x 1 (for optional AJ-WM50 Series Wireless Module, for USB memory)]	SDI in [BNC x 1 (3G/HD-SDI)] HDMI in [HDMI 19-pin x 2] Serial/Multi Projector Sync in [D-sub 9-pin x 1 (RS-232C)] Serial/Multi Projector Sync out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [D-sub 9-pin x 1] Remote 2 in [M3 x 1] Remote out [M3 x 1] LAN [RJ-45 x 1] DIGITAL LINK/Art-net [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 2 A))] USB [USB type A x 1 (for optional AJ-WM50 Series Wireless Module, for USB memory)]	SDI in [BNC x 1 (3G/HD-SDI)] HDMI in [HDMI 19-pin x 2] Serial/Multi Projector Sync in [D-sub 9-pin x 1 (RS-232C)] Serial/Multi Projector Sync out [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [D-sub 9-pin x 1] Remote 2 in [M3 x 1] Remote out [M3 x 1] LAN [RJ-45 x 1] DIGITAL LINK/Art-net [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 2 A))] USB [USB type A x 1 (for optional AJ-WM50 Series Wireless Module, for USB memory)]
Power supply		100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz
Power consumption by mode		Normal: 1,000 W Eco: 610 W Standby: 10 W Max: 1,100 W	Normal: 850 W Eco: 560 W Standby: 10 W Max: 950 W	Normal: 690 W Eco: 445 W Standby: 10 W Max: 800 W	Normal: 520 W Eco: 340 W Standby: 10 W Max: 615 W
BTU value		Max. 3,754 BTU	Max. 2,457 BTU	Max. 2,013 BTU	Max. 1,535 BTU
Operation noise		42 dB (NORMAL), 36 dB (QUIET)	38 dB (NORMAL), 32 dB (QUIET)	35 dB (NORMAL), 30 dB (QUIET)	35 dB (NORMAL), 30 dB (QUIET)
Dimensions (W x H³ x D⁴)		650 x 211 x 440 mm (25-19/32 x 8-5/16 x 17-5/16 in)	650 x 211 x 440 mm (25-19/32 x 8-5/16 x 17-5/16 in)	650 x 211 x 440 mm (25-19/32 x 8-5/16 x 17-5/16 in)	650 x 211 x 440 mm (25-19/32 x 8-5/16 x 17-5/16 in)
Weight⁵		Approx. 23.0 kg/50.7 lbs	Approx. 22.5 kg/49.6 lbs	Approx. 22.5 kg/49.6 lbs	Approx. 22.5 kg/49.6 lbs
Optional accessories		ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE301B (Attachment for ceiling mount bracket) ET-RFM100 (Replacement filter) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ⁹ ET-NUK10 (NFC Upgrade Kit) ⁹	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE301B (Attachment for ceiling mount bracket) ET-RFM100 (Replacement filter) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ⁹ ET-NUK10 (NFC Upgrade Kit) ⁹	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE301B (Attachment for ceiling mount bracket) ET-RFM100 (Replacement filter) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ⁹ ET-NUK10 (NFC Upgrade Kit) ⁹	ET-PKD130H (High ceiling mount bracket) ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE301B (Attachment for ceiling mount bracket) ET-RFM100 (Replacement filter) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ⁹ ET-NUK10 (NFC Upgrade Kit) ⁹
Optional lens		Yes (see the Optional Lenses page: P47)	Yes (see the Optional Lenses page: P47)	Yes (see the Optional Lenses page: P47)	Yes (see the Optional Lenses page: P47)

1: After approximately 20,000 hours, cleaning needs to be performed (by the vendor which you purchased from). The light source's lifetime may be shortened due to environmental conditions and operating mode. 2: The lens shift cannot be used with a fixed-focus lens. 3: Height; with legs at shortest position. 4: Depth; Not including lens or protruding parts. 5: Average value. Each product has an individual variable in weight. 6: HDMI/DIGITAL LINK input only.

7: 2.54-10.16 m [100-400 in] (with ET-EMU100) 8: Vertical ±50 %, -20% and horizontal ±20 % with the ET-EMU100. Vertical ±40% and horizontal ±19 % with the ET-EMW200. Vertical ±50% and horizontal ±20 % with the ET-EMW300. 9: Product availability may vary by country or region. To use NFC function, Smart Projector Control App is required. 10: 2.54-10.16 m [100-400 in] (with ET-EMU100), 2.03-12.7 m [80-500 in] (with ET-EMT800)

Installation

		PT-MZ880	PT-MZ780	PT-MZ680
		 <p>8,000 lm WUXGA *Available in black/white cabinet.</p> 	 <p>7,000 lm WUXGA *Available in black/white cabinet.</p> 	 <p>6,000 lm WUXGA *Available in black/white cabinet.</p> 
Projector type		LCD Projector	LCD Projector	LCD Projector
LCD panel	Panel size	19.3 mm (0.76 in)	19.3 mm (0.76 in)	19.3 mm (0.76 in)
	Aspect ratio	16:10	16:10	16:10
	Number of pixels	2,304,000 (1,920 x 1,200) pixels x 3	2,304,000 (1,920 x 1,200) pixels x 3	2,304,000 (1,920 x 1,200) pixels x 3
Light source		Laser diode	Laser diode	Laser diode
Light output		8,000 lm	7,000 lm	6,000 lm
Time until light output declines to 50%¹		20,000 hours (NORMAL/QUIET)/ 24,000 hours (ECO)	20,000 hours (NORMAL/QUIET)/ 24,000 hours (ECO)	20,000 hours (NORMAL/QUIET)/ 24,000 hours (ECO)
Resolution		WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)
Contrast ratio (full on/full off)		3,000,000:1	3,000,000:1	3,000,000:1
Screen size (diagonal)		1.02-10.16 m (40-400 in) ⁷	1.02-10.16 m (40-400 in) ⁷	1.02-10.16 m (40-400 in) ⁷
Lens (throw ratio)		F 1.7-2.3, f 26.8-45.5 mm (1.6-2.8:1)	F 1.7-2.3, f 26.8-45.5 mm (1.6-2.8:1)	F 1.7-2.3, f 26.8-45.5 mm (1.6-2.8:1)
Lens shift²		Vertical: ±67 % ⁸ , Horizontal: ±35 % ⁸ (powered)	Vertical: ±67 % ⁸ , Horizontal: ±35 % ⁸ (powered)	Vertical: ±67 % ⁸ , Horizontal: ±35 % ⁸ (powered)
Filter Replacement Cycle		20,000 hours	20,000 hours	20,000 hours
Installation				Ceiling/floor, front/rear
Terminals		HDMI in [HDMI 19-pin x 3] Computer in [D-sub HD 15-pin x 1] Monitor out [D-sub HD 15-pin x 1] Serial/Multi Sync in [D-sub 9-pin x 1 (RS-232C)] Multi Sync out [D-sub 9-pin x 1] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] Audio in [M3 x 1] Audio out [M3 x 1] DIGITAL LINK/LAN [RJ-45 x 1] LAN [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 2 A))]	HDMI in [HDMI 19-pin x 3] Computer in [D-sub HD 15-pin x 1] Monitor out [D-sub HD 15-pin x 1] Serial/Multi Sync in [D-sub 9-pin x 1 (RS-232C)] Multi Sync out [D-sub 9-pin x 1] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] Audio in [M3 x 1] Audio out [M3 x 1] DIGITAL LINK/LAN [RJ-45 x 1] LAN [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 2 A))]	HDMI in [HDMI 19-pin x 3] Computer in [D-sub HD 15-pin x 1] Monitor out [D-sub HD 15-pin x 1] Serial/Multi Sync in [D-sub 9-pin x 1 (RS-232C)] Multi Sync out [D-sub 9-pin x 1] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] Audio in [M3 x 1] Audio out [M3 x 1] DIGITAL LINK/LAN [RJ-45 x 1] LAN [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 2 A))]
Power supply		100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz
Power consumption by mode		Normal: 415 W Eco: 300 W Standby: 15 W Max: 490 W	Normal: 375 W Eco: 275 W Standby: 15 W Max: 435 W	Normal: 315 W Eco: 230 W Standby: 15 W Max: 360 W
BTU value		Max. 1,675 BTU	Max. 1,485 BTU	Max. 1,230 BTU
Operation noise		34 dB (NORMAL/ECO)/ 27 dB (QUIET)	32 dB (NORMAL/ECO)/ 26 dB (QUIET)	32 dB (NORMAL/ECO)/ 26 dB (QUIET)
Dimensions (W x H³ x D⁴)		561 x 190 x 437 mm (22-3/32 x 7-15/32 x 17-7/32 in)	561 x 190 x 437 mm (22-3/32 x 7-15/32 x 17-7/32 in)	561 x 190 x 437 mm (22-3/32 x 7-15/32 x 17-7/32 in)
Weight⁵		Approx. 18.6 kg/41.0 lbs	Approx. 18.6 kg/41.0 lbs	Approx. 17.6 kg/38.8 lbs
Optional accessories		ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE301B (Attachment for ceiling mount bracket) ET-RFM100 (Replacement filter) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box)	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE301B (Attachment for ceiling mount bracket) ET-RFM100 (Replacement filter) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box)	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE301B (Attachment for ceiling mount bracket) ET-RFM100 (Replacement filter) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box)
Optional lens		Yes (see the Optional Lenses page: P49)	Yes (see the Optional Lenses page: P49)	Yes (see the Optional Lenses page: P49)

1: After approximately 20,000 hours, cleaning needs to be performed (by the vendor which you purchased from). The light source's lifetime may be shortened due to environmental conditions and operating mode. 2: The lens shift cannot be used with a fixed-focus lens. 3: Height: with legs at shortest position. 4: Depth: Not including lens or protruding parts.

5: Average value. Each product has an individual variable in weight. 6: HDMI/DIGITAL LINK input only. 7: 1.52-10.16 m [60-400 in] (with ET-ELW22), 2.54-10.16 m [100-400 in] (with ET-ELU20) 8: Vertical ±60 % and horizontal ±30 % with the ET-ELW22. Vertical ±50 % and horizontal ±24 % with the ET-ELU20.

DIGITAL LINK

Next-Generation High-Quality Digital Transmission over a Single Cable




High Quality
Long Distance
Cost Effective

DIGITAL LINK is a connection system based on HDBase™ technology that supports the transmission of HDMI signals, uncompressed Full-HD videos, audio, and control commands through a single LAN cable for very long distances - up to 150 m (492 ft) in Long Reach Mode.* It's a simple, high-quality digital transmission technology that works to reduce installation cost and complexity in venues of all sizes.

For Auditorium, Museum, Digital signage and more


Flexible Expandability with ET-YFB200G



DIGITAL LINK Switcher ET-YFB200G (Optional)

For Classrooms, Meeting rooms, Retail outlets, etc.

Simple One-to-One Connection with ET-YFB100G



Digital Interface Box ET-YFB100G (Optional)

*For more information about Long Reach mode compatible model, please visit the website >> panasonic.net/cns/prodisplays/solutions/technology/digital_link/#projector

The DIGITAL LINK World







DIGITAL LINK supports the control protocol of the industry's leading manufacturers, including Crestron, Extron, AMX, and many more. This makes it easy to configure a wide variety of systems, and allows easy integration into an existing control system.



For more information about DIGITAL LINK, please visit the website >> panasonic.net/cns/prodisplays/solutions/technology/digital_link/

Note: For DIGITAL LINK-ready models, see the "Function" column of the Feature Compatibility Chart on page 51 to 56.











Installation

		PT-EZ770Z PT-EZ770ZL ⁶	PT-EW730Z PT-EW730ZL ⁶	PT-EX800Z PT-EX800ZL ⁶
		 6,500 lm WUXGA 	 7,000 lm WXGA 	 7,500 lm XGA 
Projector type		LCD Projector	LCD Projector	LCD Projector
LCD panel	Panel size	19.0 mm (0.76 in)	19.0 mm (0.76 in)	20.0 mm (0.79 in)
	Aspect ratio	16:10	16:10	4:3
	Number of pixels	2,304,000 (1,920 x 1,200) pixels	1,024,000 (1,280 x 800) pixels	786,432 (1,024 x 768) pixels
Light source		400 W UHM Lamp	400 W UHM Lamp	400 W UHM Lamp
Light output		6,500 lm	7,000 lm	7,500 lm
Time until light output declines to 50%¹		3,000 hours (NORMAL)/4,000 hours (ECO1)/4,500 hours (ECO2)	3,000 hours (NORMAL)/4,000 hours (ECO1)/4,500 hours (ECO2)	3,000 hours (NORMAL)/4,000 hours (ECO1)/4,500 hours (ECO2)
Resolution		WUXGA (1,920 x 1,200)	WXGA (1,280 x 800)	XGA (1,024 x 768)
Contrast ratio (full on/full off)		5,000:1	5,000:1	5,000:1
Screen size (diagonal)		1.02-10.16 m (40-400 in) ⁷	1.02-10.16 m (40-400 in) ⁷	1.02-10.16 m (40-400 in) ⁷
Lens (throw ratio)		F 1.7-2.3, f 26.9-45.4 mm (1.7-2.8:1) (PT-EZ770Z)	F 1.7-2.3, f 26.9-45.4 mm (1.7-2.8:1) (PT-EW730Z)	F 1.7-2.3, f 26.9-45.4 mm (1.7-2.8:1) (PT-EX800Z)
Lens shift²		Vertical: ±60 %, Horizontal: ±10 % (powered)	Vertical: ±60 %, Horizontal: ±10 % (powered)	Vertical: ±50 %, Horizontal: ±10 % (powered)
Filter Replacement Cycle		15,000 hours	15,000 hours	15,000 hours
Installation		Ceiling/floor, front/rear	Ceiling/floor, front/rear	Ceiling/floor, front/rear
Terminals		HDMI in [HDMI 19-pin x 1] DVI-D in [DVI-D 24-pin x 1] DisplayPort in [DP-20P x 1] RGB 1 in [D-sub HD 15-pin x 1] RGB 2 in [BNC x 5] Video in [Pin jack x 1] Monitor out [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] LAN/DIGITAL LINK [RJ-45 x 1]	HDMI in [HDMI 19-pin x 1] DVI-D in [DVI-D 24-pin x 1] DisplayPort in [DP-20P x 1] RGB 1 in [D-sub HD 15-pin x 1] RGB 2 in [BNC x 5] Video in [Pin jack x 1] Monitor out [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] LAN/DIGITAL LINK [RJ-45 x 1]	HDMI in [HDMI 19-pin x 1] DVI-D in [DVI-D 24-pin x 1] DisplayPort in [DP-20P x 1] RGB 1 in [D-sub HD 15-pin x 1] RGB 2 in [BNC x 5] Video in [Pin jack x 1] Monitor out [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [M3 x 1] Remote 2 in [D-sub 9-pin x 1] LAN/DIGITAL LINK [RJ-45 x 1]
Power supply		100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz
Maximum power consumption		590 W	575 W	575 W
BTU value		Max. 2,013 BTU	Max. 1,962 BTU	Max. 1,962 BTU
Built-in speaker		10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)
Operation noise		37 dB (NORMAL)/31 dB (ECO1)/29 dB (ECO2)	37 dB (NORMAL)/31 dB (ECO1)/29 dB (ECO2)	37 dB (NORMAL)/31 dB (ECO1)/29 dB (ECO2)
Dimensions (W x H³ x D⁴)		530 x 177 x 445 mm (20-7/8 x 6-31/32 x 17-17/32 in)	530 x 177 x 445 mm (20-7/8 x 6-31/32 x 17-17/32 in)	530 x 177 x 445 mm (20-7/8 x 6-31/32 x 17-17/32 in)
Weight⁵		Approx. 10.6 kg/23.4 lbs (9.8 kg/21.6 lbs ⁶)	Approx. 10.6 kg/23.4 lbs (9.8 kg/21.6 lbs ⁶)	Approx. 10.6 kg/23.4 lbs (9.8 kg/21.6 lbs ⁶)
Replacement lamp		ET-LAE300	ET-LAE300	ET-LAE300
Optional accessories		ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE300B (Bracket assembly) ET-RFE300 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box)	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE300B (Bracket assembly) ET-RFE300 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box)	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE300B (Bracket assembly) ET-RFE300 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box)
Optional lens		Yes (see the Optional Lenses page: P49)	Yes (see the Optional Lenses page: P49)	Yes (see the Optional Lenses page: P49)

1: The usage environment affects the lamp replacement cycle.
2: The lens shift cannot be used with a fixed-focus lens.
3: Height: with legs at shortest position.

4: Depth: Not including lens or protruding parts.
5: Average value. Each product has an individual variable in weight.
6: Lens-less model. 7: 1.52-10.16 m (60-400 in) with the ET-ELW22.

Installation

	PT-EZ590 PT-EZ590L ⁵	PT-EW650 PT-EW650L ⁵	PT-EW550 PT-EW550L ⁵	PT-EX620 PT-EX620L ⁵	PT-EX520 PT-EX520L ⁵
	 5,400 lm WUXGA 	 5,800 lm WXGA 	 5,000 lm WXGA 	 6,200 lm XGA 	 5,300 lm XGA 
Projector type	LCD Projector	LCD Projector	LCD Projector	LCD Projector	LCD Projector
LCD panel	Panel size 16.3 mm (0.64 in) Aspect ratio 16:10 Number of pixels 2,304,000 (1,920 x 1,200) pixels	Panel size 16.3 mm (0.64 in) Aspect ratio 16:10 Number of pixels 1,024,000 (1,280 x 800) pixels	Panel size 16.3 mm (0.64 in) Aspect ratio 16:10 Number of pixels 1,024,000 (1,280 x 800) pixels	Panel size 16.0 mm (0.63 in) Aspect ratio 4:3 Number of pixels 786,432 (1,024 x 768) pixels	Panel size 16.0 mm (0.63 in) Aspect ratio 4:3 Number of pixels 786,432 (1,024 x 768) pixels
Light source	320 W UHM Lamp	320 W UHM Lamp	320 W UHM Lamp	320 W UHM Lamp	320 W UHM Lamp
Light output	5,400 lm	5,800 lm	5,000 lm	6,200 lm	5,300 lm
Time until light output declines to 50%¹	4,000 hours (NORMAL)/ 5,000 hours (ECO)	4,000 hours (NORMAL)/ 5,000 hours (ECO)	4,000 hours (NORMAL)/ 5,000 hours (ECO)	4,000 hours (NORMAL)/ 5,000 hours (ECO)	4,000 hours (NORMAL)/ 5,000 hours (ECO)
Resolution	WUXGA (1,920 x 1,200)	WXGA (1,280 x 800)	WXGA (1,280 x 800)	XGA (1,024 x 768)	XGA (1,024 x 768)
Contrast ratio (full on/full off)	10,000:1	10,000:1	2,000:1	10,000:1	2,000:1
Screen size (diagonal)	1.02-10.16 m (40-400 in)	1.02-10.16 m (40-400 in)	1.02-10.16 m (40-400 in)	1.02-10.16 m (40-400 in)	1.02-10.16 m (40-400 in)
Lens (throw ratio)	F 1.6-2.2, f 171-31.7 mm (1.22-2.26:1) (PT-EZ590)	F 1.6-2.2, f 171-31.7 mm (1.22-2.26:1) (PT-EW650)	F 1.6-2.2, f 171-31.7 mm (1.22-2.26:1) (PT-EW550)	F 1.6-2.2, f 171-31.7 mm (1.32-2.44:1) (PT-EX620)	F 1.6-2.2, f 171-31.7 mm (1.32-2.44:1) (PT-EX520)
Lens shift	Vertical: ±60 % Horizontal: ±30 % (powered)	Vertical: ±60 % Horizontal: ±30 % (powered)	Vertical: ±60 % Horizontal: ±30 % (powered)	Vertical: ±50 % Horizontal: ±30 % (powered)	Vertical: ±50 % Horizontal: ±30 % (powered)
Filter Replacement Cycle	15,000 hours	15,000 hours	15,000 hours	15,000 hours	15,000 hours
Installation	Ceiling/floor, front/rear	Ceiling/floor, front/rear	Ceiling/floor, front/rear	Ceiling/floor, front/rear	Ceiling/floor, front/rear
Terminals	HDMI in [HDMI 19-pin x 1] RGB 1 in [BNC x 5] RGB 2 in [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Monitor out [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [D-sub 9-pin x 1] Remote 2 in [M3 x 1] LAN [RJ-45 x 1] LAN/DIGITAL LINK [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 900 mA))] Wireless Module connecting [USB type-A x 1 (for ET-WML100 ⁷)]	HDMI in [HDMI 19-pin x 1] RGB 1 in [BNC x 5] RGB 2 in [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Monitor out [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [D-sub 9-pin x 1] Remote 2 in [M3 x 1] LAN [RJ-45 x 1] LAN/DIGITAL LINK [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 900 mA))] Wireless Module connecting [USB type-A x 1 (for ET-WML100 ⁷)]	HDMI in [HDMI 19-pin x 1] RGB 1 in [BNC x 5] RGB 2 in [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Monitor out [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [D-sub 9-pin x 1] Remote 2 in [M3 x 1] LAN [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 900 mA))] Wireless Module connecting [USB type-A x 1 (for ET-WML100 ⁷)]	HDMI in [HDMI 19-pin x 1] RGB 1 in [BNC x 5] RGB 2 in [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Monitor out [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [D-sub 9-pin x 1] Remote 2 in [M3 x 1] LAN [RJ-45 x 1] LAN/DIGITAL LINK [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 900 mA))] Wireless Module connecting [USB type-A x 1 (for ET-WML100 ⁷)]	HDMI in [HDMI 19-pin x 1] RGB 1 in [BNC x 5] RGB 2 in [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Monitor out [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] Remote 1 in [D-sub 9-pin x 1] Remote 2 in [M3 x 1] LAN [RJ-45 x 1] LAN/DIGITAL LINK [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 900 mA))] Wireless Module connecting [USB type-A x 1 (for ET-WML100 ⁷)]
Power supply	100-240 V AC, 5.5-2.3 A, 50/60 Hz	100-240 V AC, 5.3-2.1 A, 50/60 Hz	100-240 V AC, 5.3-2.1 A, 50/60 Hz	100-240 V AC, 5.3-2.1 A, 50/60 Hz	100-240 V AC, 5.3-2.1 A, 50/60 Hz
Maximum power consumption	484 W	461 W	461 W	461 W	461 W
BTU value	Max. 1,651 BTU	Max. 1,573 BTU	Max. 1,573 BTU	Max. 1,573 BTU	Max. 1,573 BTU
Built-in speaker	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)
Operation noise	35 dB (NORMAL)/29 dB (ECO)	35 dB (NORMAL)/29 dB (ECO)	35 dB (NORMAL)/29 dB (ECO)	35 dB (NORMAL)/29 dB (ECO)	35 dB (NORMAL)/29 dB (ECO)
Dimensions (W x H² x D³)	498 x 145 x 398.3 mm (19-19/32 x 5-23/32 x 15-11/16 in)	498 x 145 x 398.3 mm (19-19/32 x 5-23/32 x 15-11/16 in)	498 x 145 x 398.3 mm (19-19/32 x 5-23/32 x 15-11/16 in)	498 x 145 x 398.3 mm (19-19/32 x 5-23/32 x 15-11/16 in)	498 x 145 x 398.3 mm (19-19/32 x 5-23/32 x 15-11/16 in)
Weight⁴	Approx. 8.4 kg/18.5 lbs (7.7 kg/17.0 lbs ⁵)	Approx. 8.4 kg/18.5 lbs (7.7 kg/17.0 lbs ⁵)	Approx. 8.4 kg/18.5 lbs (7.7 kg/17.0 lbs ⁵)	Approx. 8.4 kg/18.5 lbs (7.7 kg/17.0 lbs ⁵)	Approx. 8.4 kg/18.5 lbs (7.7 kg/17.0 lbs ⁵)
Replacement lamp	ET-LAEF100	ET-LAEF100	ET-LAEF100	ET-LAEF100	ET-LAEF100
Optional accessories	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE300B (Bracket assembly) ET-RFE300 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-WML100 (Wireless Module) ⁷	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE300B (Bracket assembly) ET-RFE300 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-WML100 (Wireless Module) ⁷	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE300B (Bracket assembly) ET-RFE300 (Replacement filter unit) ET-WML100 (Wireless Module) ⁷	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE300B (Bracket assembly) ET-RFE300 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-WML100 (Wireless Module) ⁷	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE300B (Bracket assembly) ET-RFE300 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-WML100 (Wireless Module) ⁷
Optional lens	Yes (see the Optional Lenses page: P49)	Yes (see the Optional Lenses page: P49)	Yes (see the Optional Lenses page: P49)	Yes (see the Optional Lenses page: P49)	Yes (see the Optional Lenses page: P49)

1: The usage environment affects the lamp replacement cycle.

2: Height: with legs at shortest position.







3: Depth: including the supplied lens. Depth: 358 mm (14-3/32 inches) for the lens-less models.

4: Average value. Each product has an individual variable in weight.

5: Lens-less model.

6: The optional ET-WML100 Wireless Module is required. 7: Limited stock.









Installation

	PT-FZ570	PT-FW530	PT-FX500	
	 4,500 lm WUXGA 	 4,500 lm WXGA 	 5,000 lm XGA 	
Projector type	LCD Projector	LCD Projector	LCD Projector	
LCD panel	Panel size	16.3 mm (0.64 in)	16.3 mm (0.64 in)	16.0 mm (0.63 in)
	Aspect ratio	16:10	16:10	4:3
	Number of pixels	2,304,000 (1,920 x 1,200) pixels	1,024,000 (1,280 x 800) pixels	786,432 (1,024 x 768) pixels
Light source	270 W UHM Lamp	270 W UHM Lamp	270 W UHM Lamp	
Light output	4,500 lm	4,500 lm	5,000 lm	
Time until light output declines to 50%¹	6,000 hours (NORMAL)/ 8,000 hours (ECO)	6,000 hours (NORMAL)/ 8,000 hours (ECO)	6,000 hours (NORMAL)/ 8,000 hours (ECO)	
Resolution	WUXGA (1,920 x 1,200)	WXGA (1,280 x 800)	XGA (1,024 x 768)	
Contrast ratio (full on/full off)	10,000:1	10,000:1	10,000:1	
Screen size (diagonal)	1.02-7.62 m (40-300 in)	1.02-7.62 m (40-300 in)	1.02-7.62 m (40-300 in)	
Lens (throw ratio)	F 1.6-2.2, f 17.1-31.7 mm (1.22-2.26:1)	F 1.6-2.2, f 17.1-31.7 mm (1.22-2.26:1)	F 1.6-2.2, f 17.1-31.7 mm (1.32-2.44:1)	
Lens shift	Vertical: ±60 %, Horizontal: ±30 % (manual)	Vertical: ±60 %, Horizontal: ±30 % (manual)	Vertical: ±50 %, Horizontal: ±30 % (manual)	
Filter Replacement Cycle	16,000 hours	16,000 hours	16,000 hours	
Installation	Ceiling/floor, front/rear	Ceiling/floor, front/rear	Ceiling/floor, front/rear	
Terminals	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 900 mA))] Wireless Module connecting [USB type-A x 1 (for ET-WML100 ⁶)]	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 900 mA))] Wireless Module connecting [USB type-A x 1 (for ET-WML100 ⁶)]	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK [RJ-45 x 1] DC out [USB type-A x 1 (for power supply (DC 5 V, up to 900 mA))] Wireless Module connecting [USB type-A x 1 (for ET-WML100 ⁶)]	
Power supply	100-240 V AC, 4.7-1.9 A, 50/60 Hz	100-240 V AC, 4.5-1.8 A, 50/60 Hz	100-240 V AC, 4.5-1.8 A, 50/60 Hz	
Maximum power consumption	413 W	400 W	400 W	
BTU value	Max. 1,410 BTU	Max. 1,365 BTU	Max. 1,365 BTU	
Built-in speaker	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)	
Operation noise	33 dB (NORMAL)/29 dB (ECO)	33 dB (NORMAL)/29 dB (ECO)	33 dB (NORMAL)/29 dB (ECO)	
Dimensions (W x H² x D³)	498 x 145 x 398.3 mm (19-19/32 x 5-23/32 x 15-11/16 in)	498 x 145 x 398.3 mm (19-19/32 x 5-23/32 x 15-11/16 in)	498 x 145 x 398.3 mm (19-19/32 x 5-23/32 x 15-11/16 in)	
Weight⁴	Approx. 7.9 kg/17.4 lbs	Approx. 7.9 kg/17.4 lbs	Approx. 7.9 kg/17.4 lbs	
Replacement lamp	ET-LAEF100	ET-LAEF100	ET-LAEF100	
Optional accessories	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE300B (Bracket assembly) ET-RFE300 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-WML100 (Wireless Module) ⁶	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE300B (Bracket assembly) ET-RFE300 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-WML100 (Wireless Module) ⁶	ET-PKD120H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE300B (Bracket assembly) ET-RFE300 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) ET-WML100 (Wireless Module) ⁶	

1: The usage environment affects the lamp replacement cycle.
2: Height: with legs at shortest position.
3: Depth: including the supplied lens.

4: Average value. Each product has an individual variable in weight.
5: The optional ET-WML100 Wireless Module is required.
6: Limited stock.







Portable

		PT-VMZ71	PT-VMZ61	PT-VMZ51	PT-VMZ51S
		 <p>7,000 lm WUXGA * Available in black/white cabinet.</p> 	 <p>6,200 lm WUXGA * Available in black/white cabinet.</p> 	 <p>5,200 lm WUXGA</p> 	 <p>5,200 lm WUXGA</p> 
Projector type		LCD Projector	LCD Projector	LCD Projector	LCD Projector
LCD panel	Panel size	16.3 mm (0.64 in)	16.3 mm (0.64 in)	16.3 mm (0.64 in)	16.3 mm (0.64 in)
	Aspect ratio	16:10	16:10	16:10	16:10
	Number of pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels
Light source	Laser diode		Laser diode	Laser diode	
Light output	7,000 lm		6,200 lm	5,200 lm	5,200 lm
Time until light output declines to 50%¹	20,000 hours (NORMAL)		20,000 hours (NORMAL)	20,000 hours (NORMAL)	20,000 hours (NORMAL)
Resolution	WUXGA (1,920 x 1,200)		WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)
Contrast ratio (full on/full off)	3,000,000:1		3,000,000:1	3,000,000:1	3,000,000:1
Screen size (diagonal)	0.76-7.62 m (30-300 in)		0.76-7.62 m (30-300 in)	0.76-7.62 m (30-300 in)	0.76-7.62 m (30-300 in)
Lens (throw ratio)	F 1.60-2.12, f 15.30-24.64 mm (1.09-1.77:1)		F 1.60-2.12, f 15.30-24.64 mm (1.09-1.77:1)	F 1.60-2.12, f 15.30-24.64 mm (1.09-1.77:1)	F 1.60-2.12, f 15.30-24.64 mm (1.09-1.77:1)
Lens shift	Vertical: +44 %, Horizontal: ±20 % (manual)		Vertical: +44 %, Horizontal: ±20 % (manual)	Vertical: +44 %, Horizontal: ±20 % (manual)	Vertical: +44 %, Horizontal: ±20 % (manual)
Filter Replacement Cycle	20,000 hours		20,000 hours	20,000 hours	20,000 hours
Installation	Ceiling/floor, front/rear, free 360-degree installation		Ceiling/floor, front/rear, free 360-degree installation	Ceiling/floor, front/rear, free 360-degree installation	Ceiling/floor, front/rear, free 360-degree installation
Terminals	HDMI 1/2 in [HDMI 19-pin x 2] Computer 1/2 in [D-sub HD 15-pin x 2] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/ power supply (DC 5 V, up to 2 A)/ optional Wireless Module)]		HDMI 1/2 in [HDMI 19-pin x 2] Computer 1/2 in [D-sub HD 15-pin x 2] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/ power supply (DC 5 V, up to 2 A)/ optional Wireless Module)]	HDMI 1/2 in [HDMI 19-pin x 2] Computer 1/2 in [D-sub HD 15-pin x 2] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/ power supply (DC 5 V, up to 2 A)/ optional Wireless Module)]	HDMI 1/2 in [HDMI 19-pin x 2] Computer 1/2 in [D-sub HD 15-pin x 2] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/ power supply (DC 5 V, up to 2 A)/ optional Wireless Module)]
Power supply	100-240 V AC, 50/60 Hz		100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz
Maximum power consumption	420 W		370 W	305 W	300 W
Built-in speaker	10.0 W (monaural)		10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)
Operation noise	38 dB (NORMAL/ECO)/28 dB (QUIET)		36 dB (NORMAL/ECO)/26 dB (QUIET)	36 dB (NORMAL/ECO)/26 dB (QUIET)	36 dB (NORMAL/ECO)/26 dB (QUIET)
Dimensions (W x H² x D)	399 x 133 x 348 mm (15-23/32 x 5-1/4 x 13-11/16 in)		399 x 133 x 348 mm (15-23/32 x 5-1/4 x 13-11/16 in)	399 x 133 x 348 mm (15-23/32 x 5-1/4 x 13-11/16 in)	399 x 133 x 348 mm (15-23/32 x 5-1/4 x 13-11/16 in)
Weight³	Approx. 7.0 kg/15.4 lbs		Approx. 6.9 kg/15.2 lbs	Approx. 6.5 kg/14.3 lbs	Approx. 6.5 kg/14.3 lbs
Replacement lamp	- (No lamp)		- (No lamp)	- (No lamp)	- (No lamp)
Optional accessories	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKV400B (Bracket assembly) ET-RFV500 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ⁶		ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKV400B (Bracket assembly) ET-RFV500 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ⁶	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKV400B (Bracket assembly) ET-RFV500 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 (Wireless Module) ⁶	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKV400B (Bracket assembly) ET-RFV500 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁶

1: After approximately 20,000 hours, cleaning needs to be performed (by the vendor which you purchased from). The light source's lifetime may be shortened due to environmental conditions and operating mode. 2: Height: with legs at shortest position. 3: Average value. Each product has an individual variable in weight.

4: Input signals are converted to the projector's display resolution upon playback. 4K/30p signals are supported via HDMI and DIGITAL LINK terminal. 5: The optional Wireless Module is required. 6: The availability varies depending on the country. 7: Input signals are converted to the projector's display resolution upon playback. 4K/30p signals are supported via HDMI terminal.

Portable

		PT-LMZ460	PT-LMZ420	PT-LMW460
		 <p>4,600 lm WUXGA</p> 	 <p>4,200 lm WUXGA</p> 	 <p>4,600 lm WXGA</p> 
Projector type		LCD Projector	LCD Projector	LCD Projector
LCD panel	Panel size	16.3 mm (0.64 in)	16.3 mm (0.64 in)	16.3 mm (0.64 in)
	Aspect ratio	16:10	16:10	16:10
	Number of pixels	2,304,000 (1,920 x 1,200) pixels	2,304,000 (1,920 x 1,200) pixels	1,024,000 (1,280 x 800) pixels
	Light source	Laser diode	Laser diode	Laser diode
Light output	4,600 lm	4,200 lm	4,600 lm	
Time until light output declines to 50%	20,000 hours (NORMAL) ⁵	20,000 hours (NORMAL) ⁵	20,000 hours (NORMAL) ⁵	
Resolution	WUXGA (1,920 x 1,200)	WUXGA (1,920 x 1,200)	WXGA (1,280 x 800)	
Contrast ratio (full on/full off)	3,000,000:1	3,000,000:1	3,000,000:1	
Screen size (diagonal)	0.76-7.62 m (30-300 in)	0.76-7.62 m (30-300 in)	0.76-7.62 m (30-300 in)	
Lens (throw ratio)	F 1.61-1.76, f 19.10-23.0 mm (1.36-1.64:1)	F 1.61-1.76, f 19.10-23.0 mm (1.36-1.64:1)	F 1.61-1.76, f 19.10-23.0 mm (1.36-1.64:1)	
Lens shift	- [fixed]	- [fixed]	- [fixed]	
Filter Replacement Cycle	20,000 hours	20,000 hours	20,000 hours	
Installation	Ceiling/floor, front/rear, free 360-degree installation	Ceiling/floor, front/rear, free 360-degree installation	Ceiling/floor, front/rear, free 360-degree installation	
Terminals	HDMI 1/2 in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/ power supply (DC 5 V, up to 2 A)/ optional Wireless Module)]	HDMI 1/2 in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/ power supply (DC 5 V, up to 2 A)/ optional Wireless Module)]	HDMI 1/2 in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/ power supply (DC 5 V, up to 2 A)/ optional Wireless Module)]	
Power supply	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	
Maximum power consumption	240 W	240 W	230 W	
Built-in speaker	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)	
Operation noise	35 dB (NORMAL/ECO)/24 dB (QUIET)	33 dB (NORMAL/ECO)/23 dB (QUIET)	35 dB (NORMAL/ECO)/24 dB (QUIET)	
Dimensions (W x H¹ x D)	349 x 105 x 309 mm (13-3/4 x 4-1/8 x 12-5/32 in)	349 x 105 x 309 mm (13-3/4 x 4-1/8 x 12-5/32 in)	349 x 105 x 309 mm (13-3/4 x 4-1/8 x 12-5/32 in)	
Weight²	Approx. 4.2 kg/9.26 lbs	Approx. 4.2 kg/9.26 lbs	Approx. 4.2 kg/9.26 lbs	
Replacement lamp	- (No lamp)	- (No lamp)	- (No lamp)	
Optional accessories	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL420B (Bracket assembly) ET-RFL400 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁶	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL420B (Bracket assembly) ET-RFL400 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁶	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL420B (Bracket assembly) ET-RFL400 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁶	

1: Height; with legs at shortest position. 2: Average value. Each product has an individual variable in weight.
3: Input signals are converted to the projector's display resolution upon playback. 4K/30p signals are supported via HDMI.
4: The optional Wireless Module is required.

5: After approximately 20,000 hours, cleaning needs to be performed (by the vendor which you purchased from). The light source's lifetime may be shortened due to environmental conditions and operating mode.
6: The availability varies depending on the country.







Portable

	PT-LMW420	PT-LMX460	PT-LMX420
	 <p>4,200 lm WXGA</p> 	 <p>4,600 lm XGA</p> 	 <p>4,200 lm XGA</p> 
Projector type	LCD Projector	LCD Projector	LCD Projector
LCD panel			
Panel size	16.3 mm (0.64 in)	16.3 mm (0.64 in)	16.3 mm (0.64 in)
Aspect ratio	16:10	16:10	16:10
Number of pixels	1,024,000 (1,280 x 800) pixels	786,432 (1,024 x 768) pixels	786,432 (1,024 x 768) pixels
Light source	Laser diode	Laser diode	Laser diode
Light output	4,200 lm	4,600 lm	4,200 lm
Time until light output declines to 50%	20,000 hours (NORMAL) ⁵	20,000 hours (NORMAL) ⁵	20,000 hours (NORMAL) ⁵
Resolution	WXGA (1,280 x 800)	XGA (1,024 x 768)	XGA (1,024 x 768)
Contrast ratio (full on/full off)	3,000,000:1	3,000,000:1	3,000,000:1
Screen size (diagonal)	0.76-7.62 m (30-300 in)	0.76-7.62 m (30-300 in)	0.76-7.62 m (30-300 in)
Lens (throw ratio)	F 1.61-1.76, f 19.10-23.0 mm (1.36-1.64:1)	F 1.61-1.76, f 19.10-23.0 mm (1.36-1.64:1)	F 1.61-1.76, f 19.10-23.0 mm (1.36-1.64:1)
Lens shift	- [fixed]	- [fixed]	- [fixed]
Filter Replacement Cycle	20,000 hours	20,000 hours	20,000 hours
Installation	Ceiling/floor, front/rear, free 360-degree installation	Ceiling/floor, front/rear, free 360-degree installation	Ceiling/floor, front/rear, free 360-degree installation
Terminals	HDMI 1/2 in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/ power supply (DC 5 V, up to 2 A)/ optional Wireless Module)]	HDMI 1/2 in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/ power supply (DC 5 V, up to 2 A)/ optional Wireless Module)]	HDMI 1/2 in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/ power supply (DC 5 V, up to 2 A)/ optional Wireless Module)]
Power supply	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz
Maximum power consumption	230 W	230 W	230 W
Built-in speaker	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)
Operation noise	33 dB (NORMAL/ECO)/23 dB (QUIET)	35 dB (NORMAL/ECO)/24 dB (QUIET)	33 dB (NORMAL/ECO)/23 dB (QUIET)
Dimensions (W x H¹ x D)	349 x 105 x 309 mm (13-3/4 x 4-1/8 x 12-5/32 in)	349 x 105 x 309 mm (13-3/4 x 4-1/8 x 12-5/32 in)	349 x 105 x 309 mm (13-3/4 x 4-1/8 x 12-5/32 in)
Weight²	Approx. 4.2 kg/9.26 lbs	Approx. 4.2 kg/9.26 lbs	Approx. 4.2 kg/9.26 lbs
Replacement lamp	- (No lamp)	- (No lamp)	- (No lamp)
Optional accessories	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL420B (Bracket assembly) ET-RFL400 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁶	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL420B (Bracket assembly) ET-RFL400 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁶	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL420B (Bracket assembly) ET-RFL400 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁶

1: Height; with legs at shortest position. 2: Average value. Each product has an individual variable in weight.
3: Input signals are converted to the projector's display resolution upon playback. 4K/30p signals are supported via HDMI.
4: The optional Wireless Module is required.

5: After approximately 20,000 hours, cleaning needs to be performed (by the vendor which you purchased from). The light source's lifetime may be shortened due to environmental conditions and operating mode. 6: The usage environment affects the lamp replacement cycle. 6: The availability varies depending on the country.









Portable

	PT-VW360	PT-VX430	PT-LW376
	 4,000 lm WXGA 	 4,500 lm XGA 	 3,600 lm WXGA 
Projector type	LCD Projector	LCD Projector	LCD Projector
LCD panel	Panel size	15.0 mm (0.59 in)	16.0 mm (0.63 in)
	Aspect ratio	16:10	4:3
	Number of pixels	1,024,000 (1,280 x 800) pixels	786,432 (1,024 x 768) pixels
Light source	240 W UHM Lamp	240 W UHM Lamp	230 W UHM Lamp
Light output	4,000 lm	4,500 lm	3,600 lm
Time until light output declines to 50%¹	5,000 hours (NORMAL)/7,000 hours (ECO)	5,000 hours (NORMAL)/7,000 hours (ECO)	10,000 hours (NORMAL)/20,000 hours (ECO)/10,000 hours (QUIET)
Resolution	WXGA (1,280 x 800)	XGA (1,024 x 768)	WXGA (1,280 x 800)
Contrast ratio (full on/full off)	20,000:1	20,000:1	20,000:1
Screen size (diagonal)	0.76-7.62 m (30-300 in)	0.76-7.62 m (30-300 in)	0.76-7.62 m (30-300 in)
Lens (throw ratio)	F 1.60-1.90, f 15.31-26.24 mm (1.2-1.9:1)	F 1.60-1.90, f 15.31-26.24 mm (1.2-1.9:1)	F 1.60-1.76, f 19.16-23.02 mm (1.48-1.78:1)
Lens shift	49:1 (fixed)	9:1 (fixed)	6:1 [fixed]
Filter Replacement Cycle	7,000 hours	7,000 hours	5,000 hours (NORMAL)/6,000 hours (ECO)/10,000 hours (QUIET)
Installation	Ceiling/floor, front/rear	Ceiling/floor, front/rear	Ceiling/floor, front/rear
Terminals	HDMI 1/2 in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module)] USB [USB type-B x 1 (for USB display)]	HDMI 1/2 in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1/2 [M3 x 2] Audio in 3 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module)] USB [USB type-B x 1 (for USB display)]	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1 [M3 x 1] Audio in 2 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/ power supply (DC 5 V, up to 2 A))]
Power supply	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz
Maximum power consumption	320 W	320 W	300 W
Built-in speaker	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)
Operation noise	37 dB (NORMAL)/29 dB (ECO)	37 dB (NORMAL)/29 dB (ECO)	38 dB (NORMAL)/35 dB (ECO)/30 dB (QUIET)
Dimensions (W x H² x D)	352 x 98 x 279 mm (13-27/32 x 3-27/32 x 10-31/32 in)	352 x 98 x 279 mm (13-27/32 x 3-27/32 x 10-31/32 in)	335 x 96 x 252 mm (13-3/16 x 3-25/32 x 9-29/32 in)
Weight³	Approx. 3.3 kg/7.3 lbs	Approx. 3.3 kg/7.3 lbs	Approx. 2.9 kg/6.4 lbs
Replacement lamp	ET-LAV300	ET-LAV300	ET-LAL510
Optional accessories	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKV400B (Bracket assembly) ET-RFV300 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁵ ET-WML100 (Wireless Module) ⁶ ET-ADSV (D-Sub/S-VIDEO conversion cable)	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKV400B (Bracket assembly) ET-RFV300 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁵ ET-WML100 (Wireless Module) ⁶ ET-ADSV (D-Sub/S-VIDEO conversion cable)	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL420B (Bracket assembly) ET-RFL300 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁵ ET-WML100 (Wireless Module) ⁶ ET-ADSV (D-Sub/S-VIDEO conversion cable)

1: The usage environment affects the lamp replacement cycle.
 2: Height: with legs at shortest position.
 3: Average value. Each product has an individual variable in weight.

4: To operate wireless projection, the optional Wireless Module ET-WML100/AJ-WM50 is required.
 5: The availability varies depending on the country.
 6: Stock limited.

Portable

	PT-LW336	PT-LB426	PT-LB356	PT-LB306 ⁵
	 3,100 lm WXGA 	 4,100 lm XGA 	 3,300 lm XGA 	 3,100 lm XGA 
Projector type	LCD Projector	LCD Projector	LCD Projector	LCD Projector
LCD panel	Panel size	15.0 mm (0.59 in)	16.0 mm (0.63 in)	16.0 mm (0.63 in)
	Aspect ratio	16:10	4:3	4:3
	Number of pixels	1,024,000 (1,280 x 800) pixels	786,432 (1,024 x 768) pixels	786,432 (1,024 x 768) pixels
Light source	230 W UHM Lamp	230 W UHM Lamp	230 W UHM Lamp	230 W UHM Lamp
Light output	3,100 lm	4,100 lm	3,300 lm	3,100 lm
Time until light output declines to 50%¹	10,000 hours (NORMAL)/20,000 hours (ECO)/10,000 hours (QUIET)	10,000 hours (NORMAL)/20,000 hours (ECO)/10,000 hours (QUIET)	10,000 hours (NORMAL)/20,000 hours (ECO)/10,000 hours (QUIET)	10,000 hours (NORMAL)/20,000 hours (ECO)/10,000 hours (QUIET)
Resolution	WXGA (1,280 x 800)	XGA (1,024 x 768)	XGA (1,024 x 768)	XGA (1,024 x 768)
Contrast ratio (full on/full off)	20,000:1	20,000:1	20,000:1	20,000:1
Screen size (diagonal)	0.76-7.62 m (30-300 in)	0.76-7.62 m (30-300 in)	0.76-7.62 m (30-300 in)	0.76-7.62 m (30-300 in)
Lens (throw ratio)	F 2.1-2.24, f 19.11-22.94 mm (1.47-1.77:1)	F 1.60-1.76, f 19.16-23.02 mm (1.48-1.78:1)	F 1.60-1.76, f 19.16-23.02 mm (1.48-1.78:1)	F 2.1-2.24, f 19.11-22.94 mm (1.47-1.77:1)
Lens shift	6:1 [fixed]	6:1 [fixed]	6:1 [fixed]	6:1 [fixed]
Filter Replacement Cycle	5,000 hours (NORMAL)/6,000 hours (ECO)/10,000 hours (QUIET)	5,000 hours (NORMAL)/6,000 hours (ECO)/10,000 hours (QUIET)	5,000 hours (NORMAL)/6,000 hours (ECO)/10,000 hours (QUIET)	5,000 hours (NORMAL)/6,000 hours (ECO)/10,000 hours (QUIET)
Installation	Ceiling/floor, front/rear	Ceiling/floor, front/rear	Ceiling/floor, front/rear	Ceiling/floor, front/rear
Terminals	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1 [M3 x 1] Audio in 2 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/power supply (DC 5 V, up to 2 A))]	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1 [M3 x 1] Audio in 2 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/power supply (DC 5 V, up to 2 A))]	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1 [M3 x 1] Audio in 2 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/power supply (DC 5 V, up to 2 A))]	HDMI in [HDMI 19-pin x 1] Computer in [D-sub HD 15-pin x 1] Monitor out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1 [M3 x 1] Audio in 2 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] USB [USB type-B x 1 (for service use)]
Power supply	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz
Maximum power consumption	300 W	300 W	300 W	300 W
Built-in speaker	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)	2.0 W (monaural)
Operation noise	38 dB (NORMAL)/35 dB (ECO)/30 dB (QUIET)	38 dB (NORMAL)/35 dB (ECO)/30 dB (QUIET)	38 dB (NORMAL)/35 dB (ECO)/30 dB (QUIET)	38 dB (NORMAL)/35 dB (ECO)/30 dB (QUIET)
Dimensions (W x H² x D)	335 x 96 x 252 mm (13-3/16 x 3-25/32 x 9-29/32 in)	335 x 96 x 252 mm (13-3/16 x 3-25/32 x 9-29/32 in)	335 x 96 x 252 mm (13-3/16 x 3-25/32 x 9-29/32 in)	335 x 96 x 252 mm (13-3/16 x 3-25/32 x 9-29/32 in)
Weight³	Approx. 2.9 kg/6.4 lbs	Approx. 2.9 kg/6.4 lbs	Approx. 2.9 kg/6.39 lbs	Approx. 2.8 kg/6.17 lbs
Replacement lamp	ET-LAL510	ET-LAL510	ET-LAL510	ET-LAL510
Optional accessories	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL420B (Bracket assembly) ET-RFL300 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁵ ET-WML100 (Wireless Module) ⁶ ET-ADSV (D-Sub/S-VIDEO conversion cable)	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL420B (Bracket assembly) ET-RFL300 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁵ ET-WML100 (Wireless Module) ⁶ ET-ADSV (D-Sub/S-VIDEO conversion cable)	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL420B (Bracket assembly) ET-RFL300 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁵ ET-WML100 (Wireless Module) ⁶ ET-ADSV (D-Sub/S-VIDEO conversion cable)	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL420B (Bracket assembly) ET-RFL300 (Replacement filter unit) ET-ADSV (D-Sub/S-VIDEO conversion cable)

1: The usage environment affects the lamp replacement cycle.
2: Height: with legs at shortest position.
3: Average value. Each product has an individual variable in weight.

4: To operate wireless projection, the optional Wireless Module ET-WML100/AJ-WM50 is required.
5: The availability varies depending on the country.
6: Stock limited.

Short Throw/ Ultra Short Throw

		PT-TMZ400	PT-TMW380	PT-TMX380
		 4,000 lm WUXGA  	 3,800 lm WXGA  	 3,800 lm XGA  
Projector type	LCD panel	LCD Projector	LCD Projector	LCD Projector
	Panel size	16.3 mm (0.64 in)	16.3 mm (0.64 in)	16.0 mm (0.63 in)
Light source	Aspect ratio	16:10	16:10	4:3
	Number of pixels	2,304,000 (1920 x 1200) pixels	1,024,000 (1,280 x 800) pixels	786,432 (1,024 x 768) pixels
Light output	Laser diodes	Laser diodes	Laser diodes	Laser diodes
Time until light output declines to 50% ¹	4,000 lm	3,800 lm	3,800 lm	3,800 lm
Resolution	20,000 hours (NORMAL/QUIET)/ 24,000 hours (ECO)	20,000 hours (NORMAL/QUIET)/ 24,000 hours (ECO)	20,000 hours (NORMAL/QUIET)/ 24,000 hours (ECO)	20,000 hours (NORMAL/QUIET)/ 24,000 hours (ECO)
Contrast ratio (full on/full off)	WUXGA (1920 x 1200)	WXGA (1,280 x 800)	XGA (1,024 x 768)	XGA (1,024 x 768)
Screen size (diagonal)	3,000,000:1	3,000,000:1	3,000,000:1	3,000,000:1
Lens (throw ratio)	1.27-2.67 m (50-105 in)	1.27-2.67 m (50-105 in)	1.27-2.67 m (50-105 in)	1.27-2.67 m (50-105 in)
Lens shift	F 1.8, f 6.08 mm (0.43:1)	F 1.8, f 6.08 mm (0.43:1)	F 1.8, f 6.08 mm (0.43:1)	F 1.8, f 6.08 mm (0.43:1)
Filter Replacement Cycle	-(fixed)	-(fixed)	-(fixed)	-(fixed)
Installation	20,000 hours	20,000 hours	20,000 hours	20,000 hours
Terminals	Ceiling/floor, front/rear free 360-degree installation	Ceiling/floor, front/rear free 360-degree installation	Ceiling/floor, front/rear free 360-degree installation	Ceiling/floor, front/rear free 360-degree installation
Power supply	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/ power supply (DC 5 V, up to 2 A))]	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/ power supply (DC 5 V, up to 2 A))]	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/ power supply (DC 5 V, up to 2 A))]	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in [D-sub HD 15-pin x 1] Audio in 1/2 [M3 x 2] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/ power supply (DC 5 V, up to 2 A))]
Maximum power consumption	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz
Built-in speaker	240 W	230 W	230 W	230 W
Operation noise	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)
Dimensions (W x H ² x D)	35 dB (NORMAL/ECO)/24 dB (QUIET)	35 dB (NORMAL/ECO)/24 dB (QUIET)	35 dB (NORMAL/ECO)/24 dB (QUIET)	35 dB (NORMAL/ECO)/24 dB (QUIET)
Weight ³	349 x 138 x 370 mm (13-3/4 x 5-7/16 x 14-9/16 in)	349 x 138 x 370 mm (13-3/4 x 5-7/16 x 14-9/16 in)	349 x 138 x 370 mm (13-3/4 x 5-7/16 x 14-9/16 in)	349 x 138 x 370 mm (13-3/4 x 5-7/16 x 14-9/16 in)
Replacement lamp	Approx. 4.9 kg/10.8 lbs	Approx. 4.9 kg/10.8 lbs	Approx. 4.9 kg/10.8 lbs	Approx. 4.9 kg/10.8 lbs
Optional accessories	-(No lamp)	-(No lamp)	-(No lamp)	-(No lamp)
	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL430B (Bracket assembly) ET-RFL400 (Replacement filter unit) AJ-WM50 Series (Wireless Module) ⁶	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL430B (Bracket assembly) ET-RFL400 (Replacement filter unit) AJ-WM50 Series (Wireless Module) ⁶	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL430B (Bracket assembly) ET-RFL400 (Replacement filter unit) AJ-WM50 Series (Wireless Module) ⁶	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL430B (Bracket assembly) ET-RFL400 (Replacement filter unit) AJ-WM50 Series (Wireless Module) ⁶

1: The usage environment affects the lamp replacement cycle.
2: Height: with legs at shortest position.
3: Average value. Each product has an individual variable in weight.

4: Input signals are converted to the projector's display resolution upon playback. 4K/30p signals are supported via HDMI.
5: To operate wireless projection, the optional Wireless Module AJ-WM50 is required.
6: The availability varies depending on the country.

FEATURES

Short-Throw Projectors
Promote Effective Communication
Without Screen Shadowing

Short-Throw Projection

Communicate with flair almost anywhere with support for desktop or ceiling installation. The PT-TMZ400 Series and PT-TW381R Series can be set up at arm's length from the screen to reproduce a big 80-inch image¹. As well as bringing large pictures to small spaces, the short-throw lens casts the image in front of the presenter so his or her shadow does not obscure the screen.




1: Projection distance is 73 cm for the PT-TMZ400/TMW380, 75 cm for the PT-TMX380 and PT-TX440/PT-TX350, and 80 cm for the PT-TW381R/PT-TW380 when projecting an 80-inch image.

Interactive Function

Supported projector: PT-TW381R

Communicate effectively by making notations on stills, graphics, and documents, adding new information as your meeting or lesson progresses using the supplied Interactive Light Pen or optional Interactive Pointer. Companion LightPen3 Software for Windows® or Mac improves writing smoothness for up to two presenters at once with support for high frame-rates. You can save modified images to PC for later distribution.

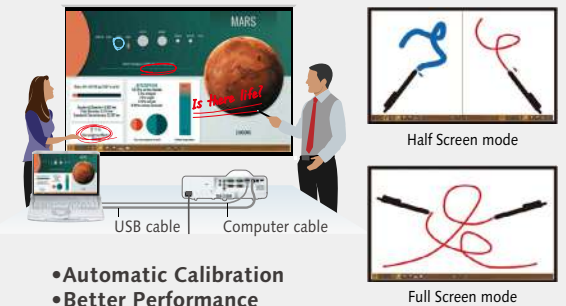

- Automatic Calibration
- Better Performance
- Supports Two Pens

For more information, please visit the website.
>>> panasonic.net/cns/projector/products/tw381r

Short Throw/
Ultra Short Throw

	PT-TW381R	PT-TW380	PT-TX440 ⁵	PT-TX350 ⁵	PT-CMZ50
	 3,300 lm WXGA  	 3,300 lm WXGA 	 3,800 lm XGA 	 3,200 lm XGA 	 5,200 lm WUXGA    * Available in black/white cabinet.
Projector type	LCD Projector	LCD Projector	LCD Projector	LCD Projector	LCD Projector
LCD panel					
Panel size	15.0 mm (0.59 in)	15.0 mm (0.59 in)	16.0 mm (0.63 in)	16.0 mm (0.63 in)	16.3 mm (0.64 in)
Aspect ratio	16:10	16:10	4:3	4:3	16:10
Number of pixels	1,024,000 (1,280 x 800) pixels	1,024,000 (1,280 x 800) pixels	786,432 (1,024 x 768) pixels	786,432 (1,024 x 768) pixels	2,304,000 (1,920 x 1,200) pixels
Light source	230 W UHM Lamp	230 W UHM Lamp	230 W UHM Lamp	230 W UHM Lamp	Laser diodes
Light output	3,300 lm	3,300 lm	3,800 lm	3,200 lm	5,200 lm
Time until light output declines to 50%¹	10,000 hours (NORMAL)/20,000 hours (ECO)/10,000 hours (QUIET)	10,000 hours (NORMAL)/20,000 hours (ECO)/10,000 hours (QUIET)	10,000 hours (NORMAL)/20,000 hours (ECO)/10,000 hours (QUIET)	10,000 hours (NORMAL)/20,000 hours (ECO)/10,000 hours (QUIET)	20,000 hours (NORMAL/QUIET)/24,000 hours (ECO)
Resolution	WXGA (1,280 x 800)	WXGA (1,280 x 800)	XGA (1,024 x 768)	XGA (1,024 x 768)	WUXGA (1,920 x 1,200)
Contrast ratio (full on/full off)	20,000:1	20,000:1	20,000:1	20,000:1	3,000,000:1
Screen size (diagonal)	1.27-2.54 m (50-100 in)	1.27-2.54 m (50-100 in)	1.27-2.54 m (50-100 in)	1.27-2.54 m (50-100 in)	2.03-3.05 m (80-120 in)
Lens (throw ratio)	F 1.8, f 6.08 mm (0.46:1)	F 1.8, f 6.08 mm (0.46:1)	F 1.8, f 6.08 mm (0.46:1)	F 1.8, f 6.08 mm (0.46:1)	F 1.7, f 2.81 mm (0.235:1)
Lens shift	6:1 [fixed]	6:1 [fixed]	6:1 [fixed]	6:1 [fixed]	- (fixed)
Filter Replacement Cycle	5,000 hours (NORMAL)/6,000 hours (ECO)/10,000 hours (QUIET)	5,000 hours (NORMAL)/6,000 hours (ECO)/10,000 hours (QUIET)	5,000 hours (NORMAL)/6,000 hours (ECO)/10,000 hours (QUIET)	5,000 hours (NORMAL)/6,000 hours (ECO)/10,000 hours (QUIET)	20,000 hours
Installation	Ceiling/floor, front/rear	Ceiling/floor, front/rear	Ceiling/floor, front/rear	Ceiling/floor, front/rear	Ceiling/floor, front/rear free 360-degree installation
Terminals	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1 [M3 x 1] Audio in 2 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/ power supply (DC 5 V, up to 2 A))] Mini USB [Mini USB x 1, (for interactive function)]	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1 [M3 x 1] Audio in 2 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/ power supply (DC 5 V, up to 2 A))]	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1 [M3 x 1] Audio in 2 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/ power supply (DC 5 V, up to 2 A))]	HDMI in [HDMI 19-pin x 2] Computer 1 in [D-sub HD 15-pin x 1] Computer 2 in/1 out [D-sub HD 15-pin x 1] Video in [Pin jack x 1] Audio in 1 [M3 x 1] Audio in 2 [Pin jack x 2 (L, R)] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/ power supply (DC 5 V, up to 2 A))]	HDMI™ in 1/ in 2 [HDMI™ 19-pin x 2] HDMI™ out [HDMI™ 19-pin x 1] Computer in [D-sub 15-pin x 1] Audio in [M3 x 1] Audio out [M3 x 1] Serial in [D-sub 9-pin x 1 (RS-232C)] LAN [RJ-45 x 1] LAN/DIGITAL LINK [RJ-45 x 1] USB [USB type-A x 1 (for Memory Viewer/Wireless Module/ power supply (DC 5 V, up to 2 A))]
Power supply	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz	100-240 V AC, 50/60 Hz
Maximum power consumption	300 W	300 W	300 W	300 W	325 W
Built-in speaker	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)	10.0 W (monaural)
Operation noise	38 dB (NORMAL)/35 dB (ECO)/30 dB (QUIET)	38 dB (NORMAL)/35 dB (ECO)/30 dB (QUIET)	38 dB (NORMAL)/35 dB (ECO)/30 dB (QUIET)	38 dB (NORMAL)/35 dB (ECO)/30 dB (QUIET)	34 dB (NORMAL/ECO)/25 dB (QUIET)
Dimensions (W x H² x D)	335 x 134.1 x 329 mm (13-3/16 x 5-9/32 x 12-15/16 in)	335 x 134.1 x 329 mm (13-3/16 x 5-9/32 x 12-15/16 in)	335 x 134.1 x 329 mm (13-3/16 x 5-9/32 x 12-15/16 in)	335 x 134.1 x 329 mm (13-3/16 x 5-9/32 x 12-15/16 in)	495 x 176 x 421 mm (19-1/2 x 6-15/16 x 16-37/64 in)
Weight³	Approx. 3.9 kg/8.6 lbs	Approx. 3.9 kg/8.6 lbs	Approx. 3.9 kg/8.6 lbs	Approx. 3.9 kg/8.6 lbs	Approx. 9.5 kg/20.9 lbs
Replacement lamp	ET-LAL510	ET-LAL510	ET-LAL510	ET-LAL510	- (No lamp)
Optional accessories	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL430B (Bracket assembly) ET-RFL300 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁵ ET-WML100 (Wireless Module) ⁶ ET-ADSV (D-Sub/S-VIDEO conversion cable) ET-PEN100 (Interactive Light pen) ET-PNT100 (Interactive Pointer)	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL430B (Bracket assembly) ET-RFL300 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁵ ET-WML100 (Wireless Module) ⁶ ET-ADSV (D-Sub/S-VIDEO conversion cable)	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL430B (Bracket assembly) ET-RFL300 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁵ ET-WML100 (Wireless Module) ⁶ ET-ADSV (D-Sub/S-VIDEO conversion cable)	ET-PKL100H (High ceiling mount bracket) ET-PKL100S (Low ceiling mount bracket) ET-PKL430B (Bracket assembly) ET-RFL300 (Replacement filter unit) AJ-WM50 (Wireless Module) ⁵ ET-WML100 (Wireless Module) ⁶ ET-ADSV (D-Sub/S-VIDEO conversion cable)	ET-PKD120H (High ceiling mount bracket) ET-PKD130H (High ceiling mount bracket) ET-PKD120S (Low ceiling mount bracket) ET-PKE301B (Attachment for ceiling mount bracket) ET-WBC100 (Wall Mount Bracket) ET-RFV500 (Replacement filter unit) ET-YFB200G (DIGITAL LINK Switcher) ET-YFB100G (Digital Interface Box) AJ-WM50 Series (Wireless Module) ⁵

1: The usage environment affects the lamp replacement cycle.
2: Height: with legs at shortest position.
3: Average value. Each product has an individual variable in weight.

4: To operate wireless projection, the optional Wireless Module ET-WML100/AJ-WM50 is required.
5: The availability varies depending on the country. 6: Stock limited.
7: HDMI input only. Supports signal up to 4K/30p.

Optional Lenses for the PT-RQ50K Projector (Large-Venue)


The Throw Distance Calculator should help you out. Please try it.
 >>> panasonic.net/cns/projector/download/#calculator



ID :Featuring Auto Lens Identification Function* M :Stepping Motor for zoom in addition to focus.

Lens type	Zoom lens	Zoom lens	Zoom lens	Zoom lens
Model number	ET-D3QW200	ET-D3QW300	ET-D3QS400	ET-D3QT500
		 ID M	 ID M	 ID M
F-number	2.5	2.5	2.5	2.5
Focal length	17.5-20.7 mm	35.2-53.7 mm	45.3-65.6 mm	61.4-105.2 mm
Weight	Approx. 11.3 kg/24.9 lbs	Approx. 9.3 kg/20.5 lbs	Approx. 8.5 kg/18.7 lbs	Approx. 9.6 kg/21.2 lbs

Lens type	Zoom lens	Zoom lens	Zoom lens
Model number	ET-D3QT600	ET-D3QT700	ET-D3QT800
	 ID M	 ID M	 ID M
F-number	2.5	2.5	2.5
Focal length	85.0-121.6 mm	122.8-172.3 mm	156.5-243.1 mm
Weight	Approx. 6.4 kg/14.1 lbs	Approx. 7.3 kg/16.1 lbs	Approx. 8.0 kg/17.6 lbs

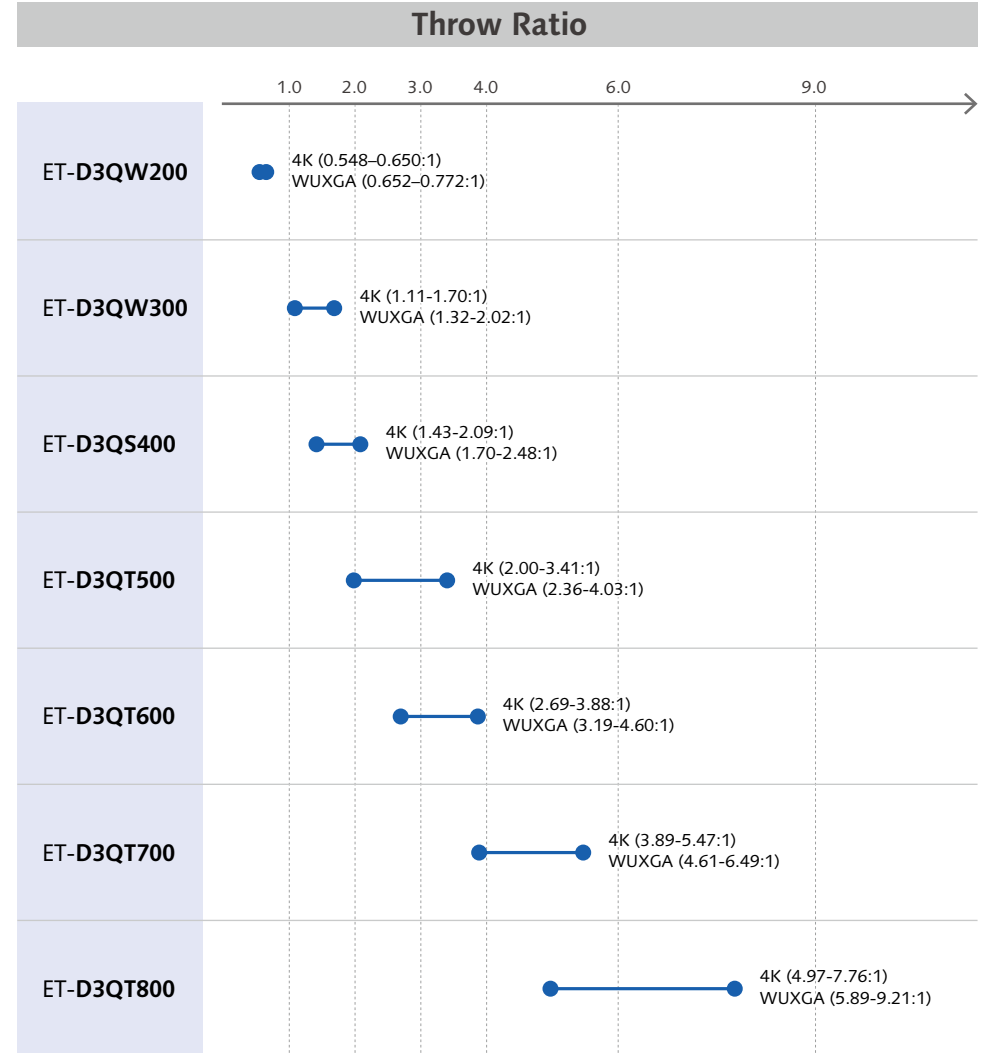

* Calibration is required each time the lens is mounted.

Large-Venue
 Installation
 Portable
 Short Throw/
 Ultra Short Throw
 Lenses
 Features
 Options
 PressIT
 Software/Apps

Optional Lenses for 3-Chip DLP™ Projector¹ (Large-Venue)

The Throw Distance Calculator should help you out. Please try it.
 >>> panasonic.net/cns/projector/download/#calculator



ID: Featuring Auto Lens Identification Function² M: Stepping Motor for zoom in addition to focus.

Lens type	Fixed-focus lens	Fixed-focus lens	Zoom lens	Fixed-focus lens	Fixed-focus lens	Zoom lens
Model number	ET-D75LE95	ET-D3LEU100	ET-D3LEW200	ET-D3LEW300	ET-D3LEW50 ⁴	ET-D3LEW60
F-number	2.5	2.5	2.5	2.5	2.5	2.5
Focal length	7.5 mm	8.0 mm	13.8-18.1 mm	16.4-19.6 mm	14.8 mm	19.6-23.5 mm
Weight	Approx. 6.5 kg/14.3 lbs	Approx. 8.0 kg/17.6 lbs	Approx. 9.0 kg/19.8 lbs	Approx. 8.0 kg/17.6 lbs	Approx. 7.1 kg/15.7 lbs	Approx. 8.7 kg/19.2 lbs

Lens type	Zoom lens	Zoom lens	Zoom lens	Zoom lens	Zoom lens
Model number	ET-D75LE6	ET-D3LEW10	ET-D3LES20	ET-D75LE20	ET-D3LET30
F-number	2.5	2.5	2.5	2.5	2.5
Focal length	19.6-23.5 mm	26.6-36.4 mm	35.0-50.9 mm	35.0-50.9 mm	50.4-98.0 mm
Weight	Approx. 8.7 kg/19.2 lbs	Approx. 6.2 kg/13.7 lbs	Approx. 5.2 kg/11.5 lbs	Approx. 5.2 kg/11.5 lbs	Approx. 5.8 kg/12.8 lbs

Lens type	Zoom lens	Zoom lens	Zoom lens
Model number	ET-D3LET40	ET-D3LET80	ET-D75LE8
F-number	2.5	2.5-2.7	2.5-2.7
Focal length	96.6-154.9 mm	154.1-288.8 mm	154.1-288.8 mm
Weight	Approx. 5.0 kg/11.0 lbs	Approx. 8.5 kg/18.7 lbs	Approx. 8.5 kg/18.7 lbs


Lens Fixed Attachment
ET-PLF20

Lens Fixed Attachment
ET-PLF10

Optional Lenses Compatibility Chart

	ET-D75LE95	ET-D3LEU100	ET-D3LEW200	ET-D3LEW300	ET-D3LEW50	ET-D3LEW60	ET-D75LE6	ET-D3LEW10	ET-D3LES20	ET-D75LE20	ET-D3LET30	ET-D3LET40	ET-D3LET80	ET-D75LE8
PT-RQ35K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PT-RZ34K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PT-RQ25K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PT-RZ24K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PT-RQ18K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PT-RZ17K	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
ET-PLF20	-	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
ET-PLF10	✓	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Throw Ratio

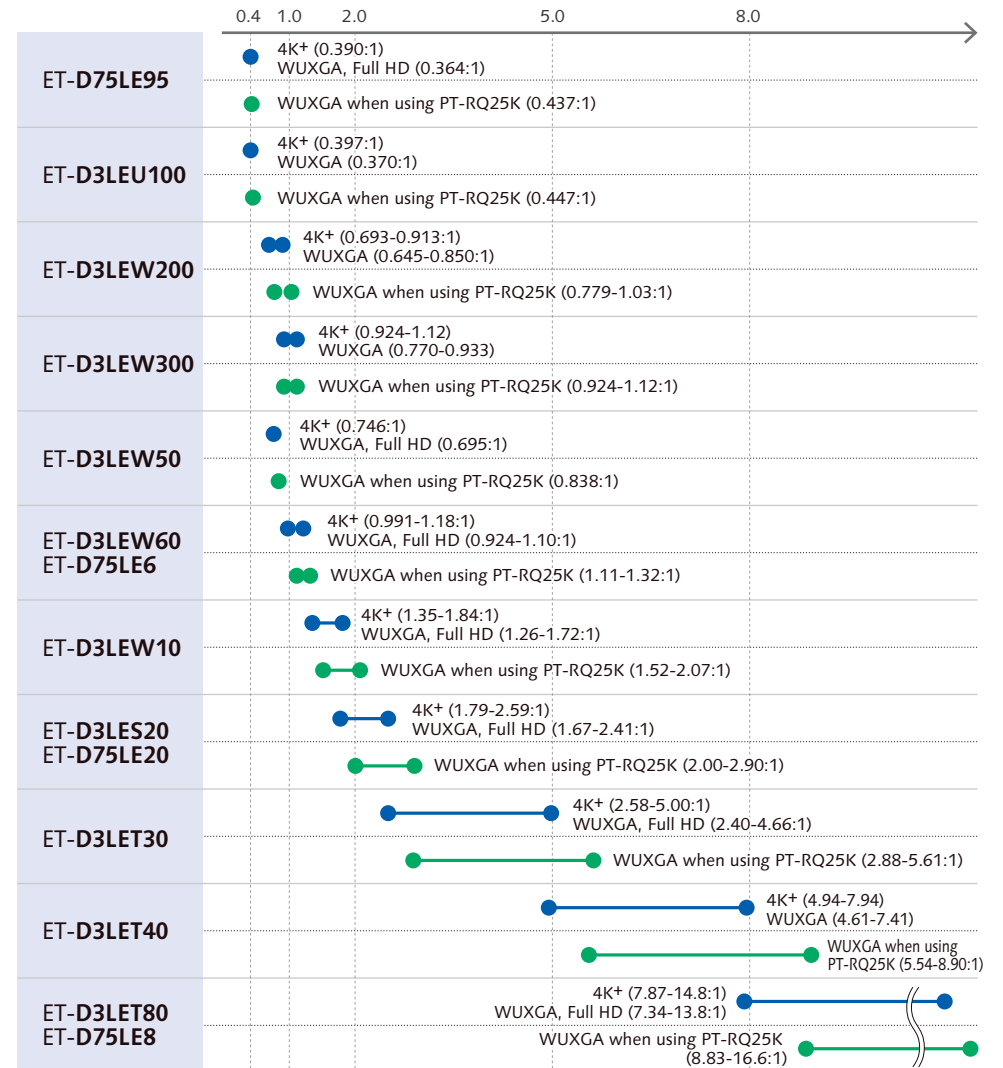



1: Except for the PT-RQ50K. 2: Calibration is required each time the lens is mounted.
 3: The picture is not final. 4: Projector may require the latest firmware update.

Large-Venue Installation Portable Short Throw/ Ultra Short Throw Lenses Features Options PressIT Software/Apps

The Throw Distance Calculator should help you out. Please try it.
 >>> panasonic.net/cns/projector/download/#calculator




Lens type	Zoom lens	Zoom lens	Zoom lens	Zoom lens
Model number	ET-C1U100	ET-C1W300	ET-C1W400	ET-C1W500
	 NEW			
F-number	2.2	1.9-2.3	1.9-2.4	1.8-2.3
Focal length	5.4-5.8 mm	9.9-12.3 mm	12.1-16.9 mm	16.7-24.6 mm
Weight	Approx. 4.9 kg/10.8 lbs (TBD)	Approx. 2.6 kg/5.73 lbs	Approx. 2.4 kg/5.29 lbs	Approx. 2.4 kg/5.29 lbs

Lens type	Zoom lens	Zoom lens
Model number	ET-C1S600	ET-C1T700
		
F-number	1.8-2.3	1.9-2.4
Focal length	23.9-37.2 mm	36.1-59.6 mm
Weight	Approx. 1.7 kg/3.75 lbs	Approx. 2.4 kg/5.29 lbs

Optional Lenses Compatibility Chart

	ET-C1U100	ET-C1W300	ET-C1W400	ET-C1W500	ET-C1S600	ET-C1T700
PT-REQ12	✓	✓	✓	✓	✓	✓
PT-REQ10	✓	✓	✓	✓	✓	✓
PT-REQ80	✓	✓	✓	✓	✓	✓
PT-REZ12	✓	✓	✓	✓	✓	✓
PT-REZ10	✓	✓	✓	✓	✓	✓
PT-REZ80	✓	✓	✓	✓	✓	✓

Throw Ratio

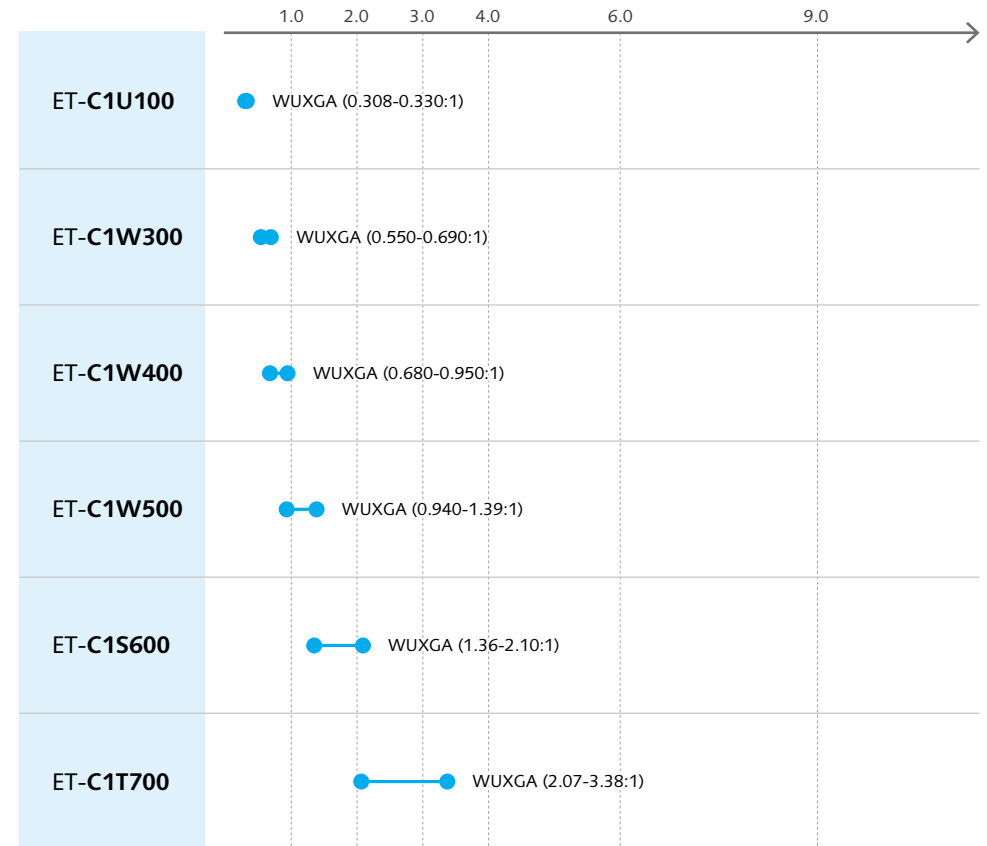



Lens type	Zoom lens	Fixed-focus lens	Fixed-focus lens	Zoom lens
Model number	ET-DLE020	ET-DLE035	ET-DLE055	ET-DLE060
F-number	2.0	2.0	1.8	1.9-2.3
Focal length	4.1-4.4 mm	5.3 mm	11.9 mm	9.2-12.1 mm
Weight	Approx. 3.2 kg/7.05 lbs	Approx. 1.3 kg/3.1 lbs	Approx. 0.8 kg/1.8 lbs	Approx. 1.3 kg/2.9 lbs


Lens type	Zoom lens	Zoom lens	Zoom lens	Zoom lens (supplied lens) ¹
Model number	ET-DLE085	ET-DLE105	ET-DLE150	ET-DLE170
F-number	1.9-2.2	1.9-2.4	1.8-2.4	1.7-1.9
Focal length	11.8-14.6 mm	14.7-19.7 mm	19.4-27.9 mm	25.6-35.7 mm
Weight	Approx. 1.3 kg/2.9 lbs	Approx. 1.2 kg/2.6 lbs	Approx. 1.1 kg/2.4 lbs	Approx. 0.9 kg/2.0 lbs

Lens type	Zoom lens	Zoom lens	Zoom lens
Model number	ET-DLE250	ET-DLE350	ET-DLE450
F-number	1.8-2.4	1.8-2.2	1.8-2.4
Focal length	33.9-53.2 mm	52.8-79.5 mm	79.5-125.2 mm
Weight	Approx. 1.0 kg/2.2 lbs	Approx. 1.1 kg/2.4 lbs	Approx. 1.3 kg/2.9 lbs

Optional Lenses Compatibility Chart

	ET-DLE020	ET-DLE035	ET-DLE055	ET-DLE060	ET-DLE085	ET-DLE105	ET-DLE150	ET-DLE170	ET-DLE250	ET-DLE350	ET-DLE450
PT-RCQ10	✓ ²	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PT-RCQ80	✓ ²	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PT-RZ120	✓ ²	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PT-RZ790	✓ ²	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PT-RZ690	✓ ²	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Throw Ratio

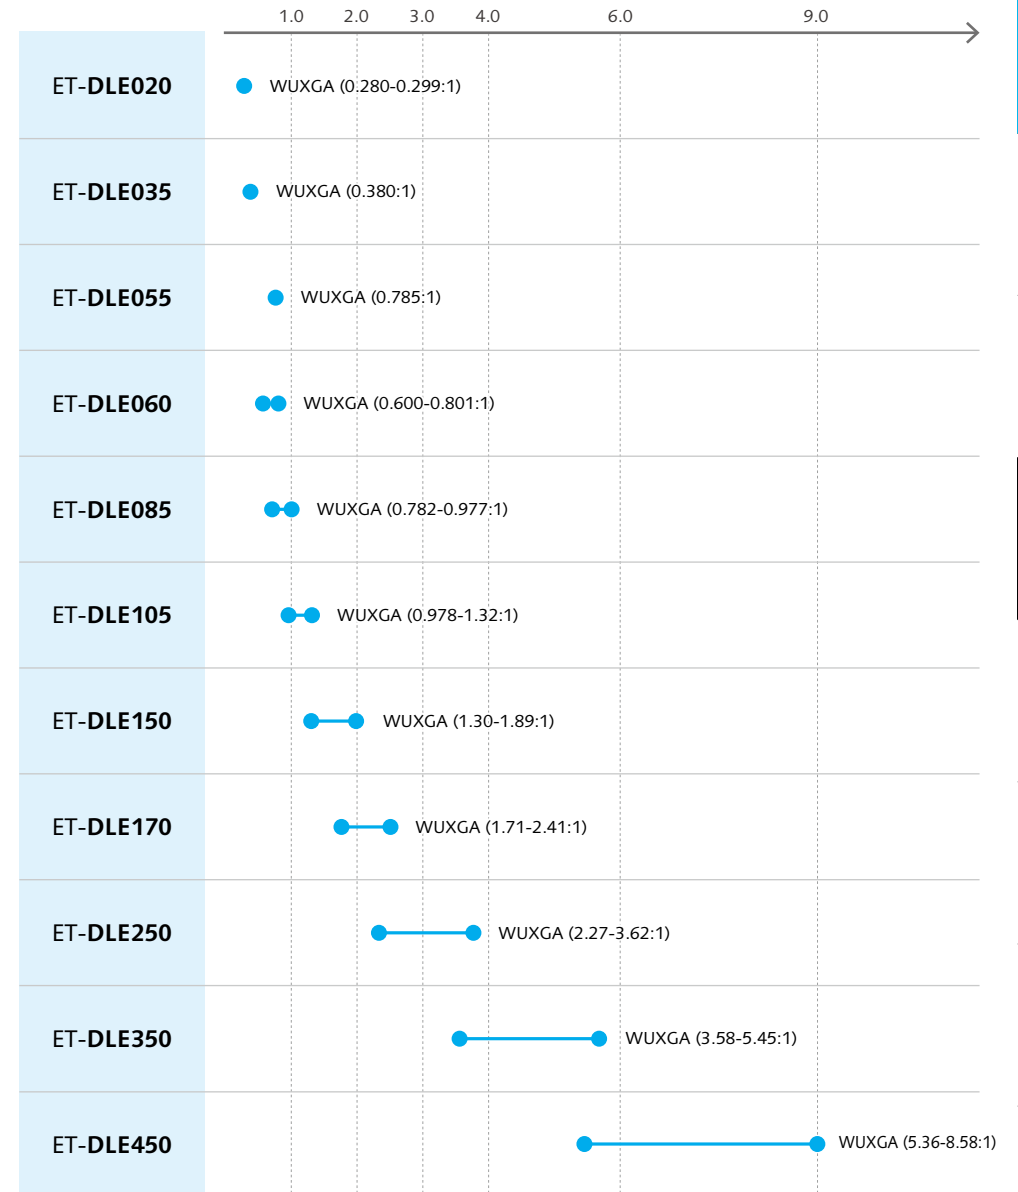

1: The ET-DLE170 is equivalent of supplied lens. Availability varies depending on the country.
 2: Projector may require the latest firmware update.

Optional Lenses for the PT-MZ20K Series Projector (Installation)

The Throw Distance Calculator should help you out. Please try it.
 >>> panasonic.net/cns/projector/download/#calculator




Lens type	Zoom lens	Zoom lens	Zoom lens	Zoom lens
Model number	ET-EMU100	ET-EMW200	ET-EMW300	ET-EMW400
F-number	1.9	1.8-2.1	1.8-2.2	1.8-2.2
Focal length	7.2-7.7 mm	10.8-12.5 mm	12.3-15.4 mm	15.3-21.1 mm
Weight	Approx. 7.2 kg/15.87 lbs	Approx. 5.20 kg/11.46 lbs	Approx. 5.20 kg/11.46 lbs	Approx. 5.05 kg/11.13 lbs

Lens type	Zoom lens	Zoom lens	Zoom lens	Zoom lens
Model number	ET-EMW500	ET-EMS650	ET-EMT750	ET-EMT850
F-number	1.8-2.4	1.8-2.2	1.8-2.5	1.9-2.4
Focal length	21.1-30.0 mm	29.9-46.3 mm	46.0-90.5 mm	90.3-162.6 mm
Weight	Approx. 5.15 kg/11.35 lbs	Approx. 3.71 kg/8.18 lbs	Approx. 4.59 kg/10.12 lbs	Approx. 4.45 kg/9.81 lbs

Optional Lenses Compatibility Chart

	ET-EMU100	ET-EMW200	ET-EMW300	ET-EMW400	ET-EMW500	ET-EMS650	ET-EMT750	ET-EMT850
PT-MZ20K	✓	✓	✓	✓	✓	✓	✓	✓
PT-MZ17K	✓	✓	✓	✓	✓	✓	✓	✓
PT-MZ14K	✓	✓	✓	✓	✓	✓	✓	✓
PT-MZ11K	✓	✓	✓	✓	✓	✓	✓	✓

Throw Ratio

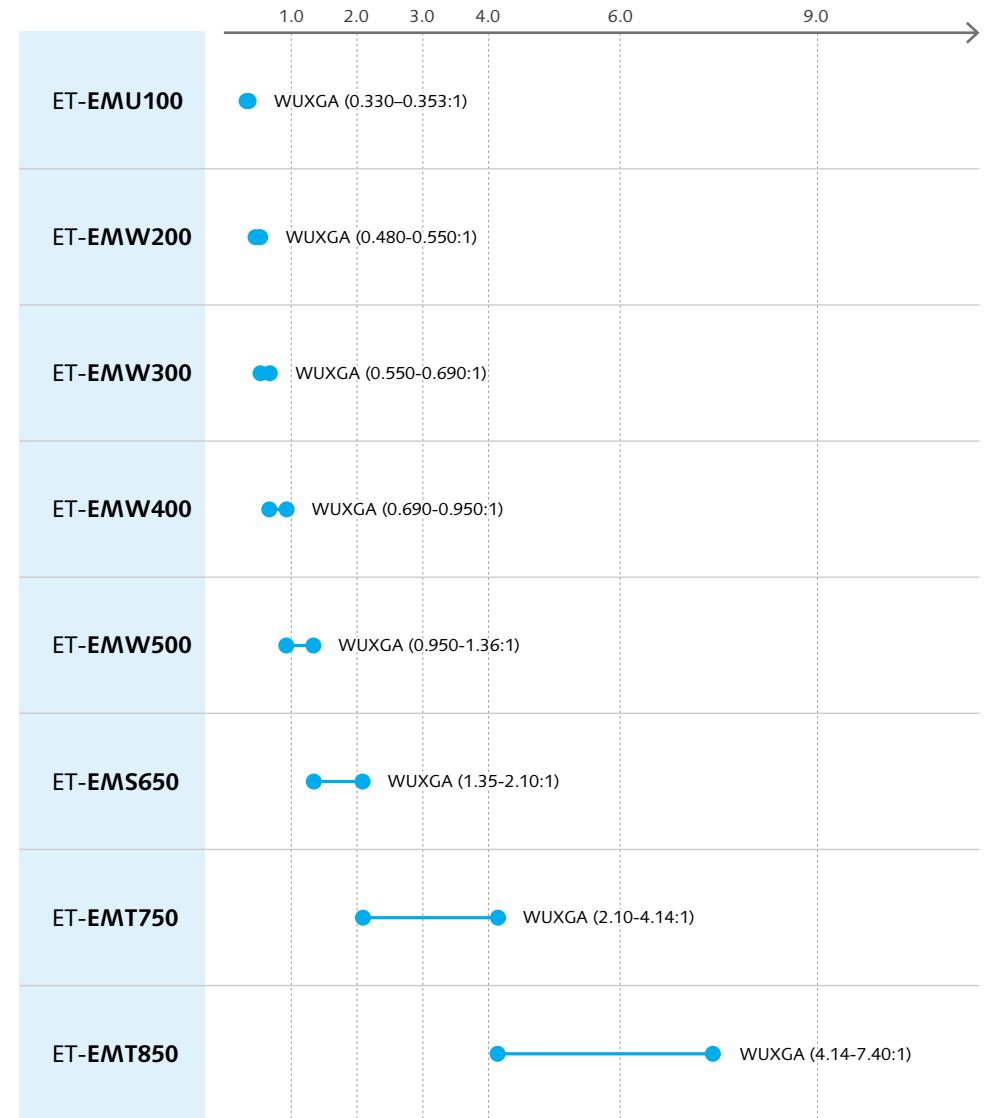

Optional Lenses for LCD Projector¹ (Installation)

The Throw Distance Calculator should help you out. Please try it.
 >>> panasonic.net/cns/projector/download/#calculator



Lens type	Zoom lens	Fixed-focus lens	Zoom lens	Zoom lens
Model number	ET-ELU20	ET-ELW21	ET-ELW22	ET-ELW20
F-number	2.0	2.0	2.0-2.4	1.8-2.3
Focal length	5.4-5.8 mm	13.1 mm	13.3-16.6 mm	20.4-27.6 mm
Weight	Approx. 4.0 kg/8.82 lbs	Approx. 1.08 kg/2.4 lbs	Approx. 1.20 kg/2.7 lbs	Approx. 1.20 kg/2.6 lbs


Lens type	Zoom lens (supplied lens) ²	Zoom lens	Zoom lens
Model number	ET-ELS20	ET-ELT22	ET-ELT23
F-number	1.7-2.3	1.8-2.3	1.8-2.3
Focal length	26.9-45.4 mm	45.6-73.8 mm	74.8-118.2 mm
Weight	Approx. 0.9 kg/2.0 lbs	Approx. 1.18 kg/2.6 lbs	Approx. 1.20 kg/2.6 lbs

Lens type	Zoom lens	Zoom lens	Zoom lens	Zoom lens
Model number	ET-ELW31	ET-ELW30	ET-ELT30	ET-ELT31
F-number	1.7-2.0	1.7-2.0	1.7-2.2	1.7-2.3
Focal length	10.5-13.6 mm	13.1-17.0 mm	31.3-56.8 mm	56.4-101.7 mm
Weight	Approx. 1.20 kg/2.6 lbs	Approx. 1.20 kg/2.6 lbs	Approx. 1.52 kg/3.4 lbs	Approx. 1.55 kg/3.4 lbs

Optional Lenses Compatibility Chart

	ET-ELU20	ET-ELW21	ET-ELW22	ET-ELW20	ET-ELS20	ET-ELT22	ET-ELT23	ET-ELW31	ET-ELW30	ET-ELT30	ET-ELT31
PT-MZ880	✓	✓	✓	✓	✓	✓	✓	-	-	-	-
PT-MZ780	✓	✓	✓	✓	✓	✓	✓	-	-	-	-
PT-MZ680	✓	✓	✓	✓	✓	✓	✓	-	-	-	-
PT-EZ770Z	-	✓	✓	✓	✓	✓	✓	-	-	-	-
PT-EW730Z	-	✓	✓	✓	✓	✓	✓	-	-	-	-
PT-EX800Z	-	✓	✓	✓	✓	✓	✓	-	-	-	-
PT-EZ590	-	-	-	-	-	-	-	✓	✓	✓	✓
PT-EW650	-	-	-	-	-	-	-	✓	✓	✓	✓
PT-EW550	-	-	-	-	-	-	-	✓	✓	✓	✓
PT-EX620	-	-	-	-	-	-	-	✓	✓	✓	✓
PT-EX520	-	-	-	-	-	-	-	✓	✓	✓	✓

Throw Ratio

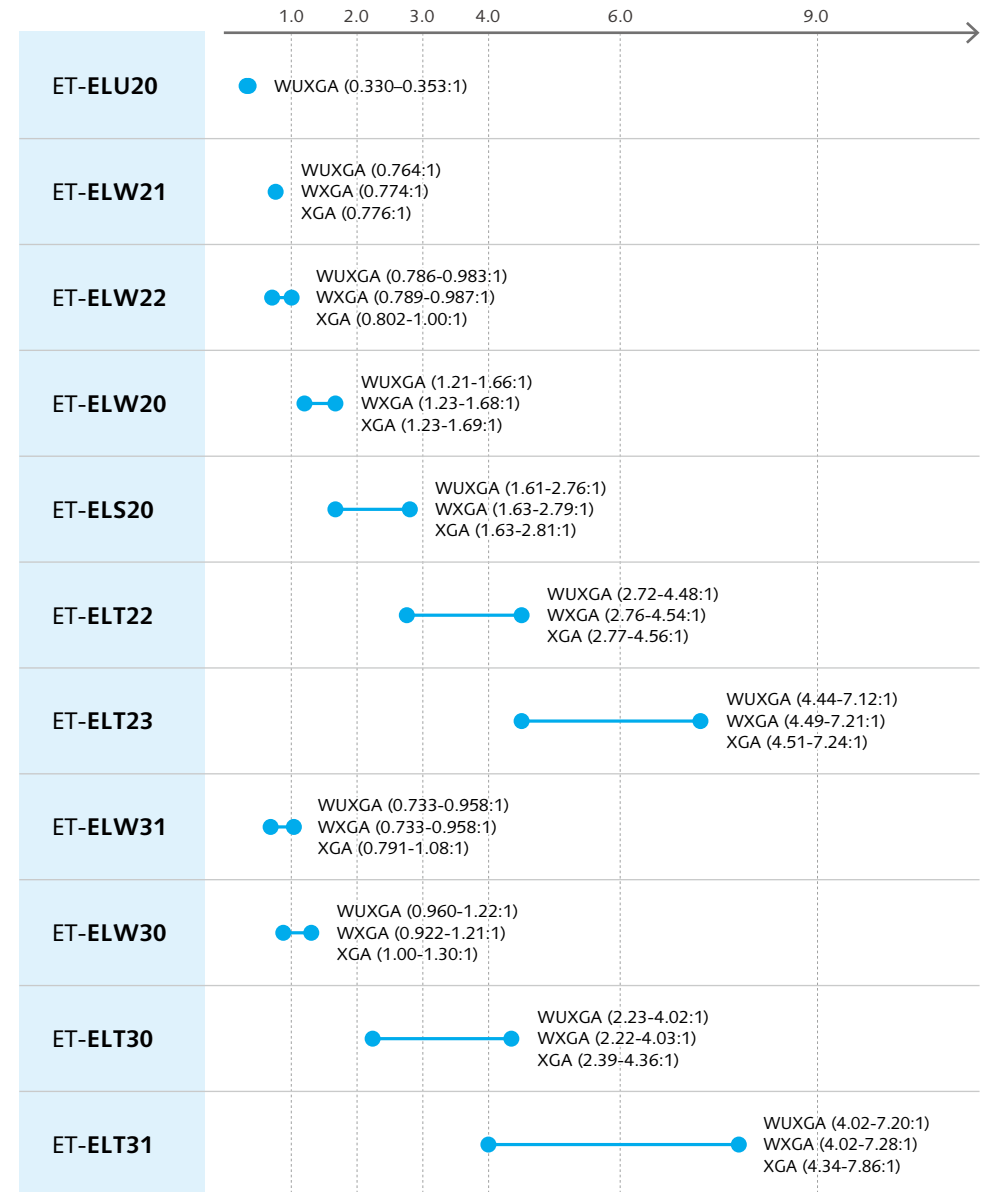

1: Except for the PT-MZ20K Series.

2: The ET-ELS20 is equivalent of supplied lens. Availability varies depending on the country.

Features (Large-Venue, Installation)

Features	PT-RQ50K	PT-RQ35K	PT-RZ34K	PT-RQ25K	PT-RZ24K	PT-RQ18K	PT-RZ17K	PT-REQ12	PT-REQ10	PT-REQ80	PT-REZ12	PT-REZ10	PT-REZ80	PT-RCQ10	PT-RCQ80	PT-RZ120	PT-RZ790	PT-RZ690	PT-FRQ60	PT-FRQ50	PT-FRZ60	PT-FRZ50	PT-FRZ55		
Picture Quality																									
Detail Clarity Processor	5+	5+	5	5+	5	5+	5	3	3	3	3			3	3	3	3	3	3	4	4	3	3	3	
System Daylight View	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Daylight View	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	Basic	Basic	Basic	-	
3D Ready	-	-	✓	-	✓	-	✓	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	
HDR compatible	✓	✓	-	✓	✓	✓	✓	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	
Dynamic Contrast	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Dynamic Contrast NX	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	
Rich Color Harmonizer	-	-	-	-	-	-	-	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Rich Color Enhancer	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	
Pure White Generator	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	✓	✓	✓	✓	✓	
240Hz content playback	-	✓	-	-	-	-	-	-	-	-	-			-	-	-	-	-	✓	✓	✓	✓	✓	✓	
Reliability																									
24/7 operation	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Backup Input	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	-	-	-	-	-	-
Filter-Less	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Installation																									
Geometric Adjustment	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Free Grid	✓	✓	✓	✓	✓	✓	✓	-	-	-	-			-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓
Edge Blending/Color Matching	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Multi-Unit Brightness and Color Control	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
360-degree free installation	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Contrast Sync and Shutter Sync	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	-	-	-	-	-	-
Corner Keystone	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Curved Screen Correction	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Function																									
Mechanical Shutter	✓	✓	✓	✓	✓	✓	✓	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	-
Data Cloning Function	✓	✓ ¹	✓ ¹	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
DIGITAL LINK	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wireless Function	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²			✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²	✓ ²
Mirroring Function	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	-
USB Memory Viewer	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	-
USB Memory Viewer Light	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	-
P-in-P	-	-	✓	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	-
Emulation	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	-
Software																									
Geometry Manager Pro	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	-	-	-	-	-	-
Smart Projector Control	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	-	-	-	-	-	-
Multi Monitoring & Control Software	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wireless Manager	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	-
Plug and Share	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	-
Presenter Light	-	-	-	-	-	-	-	-	-	-	-			-	-	-	-	-	-	-	-	-	-	-	-
Logo Transfer Software	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Projector Network Setup Software	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

1: Firmware will be available from February 2021. 2: To operate wireless function, the optional Wireless Module is required.
 3: Projector Network Setup Software can be set when the main version of the firmware is 1.04 or higher.

Features	PT-MZ20K	PT-MZ17K	PT-MZ14K	PT-MZ11K	PT-MZ880	PT-MZ780	PT-MZ680	PT-EZ770Z	PT-EW730Z	PT-EX800Z	PT-EZ590	PT-EW650	PT-EW550	PT-EX620	PT-EX520	PT-FZ570	PT-FW530	PT-FX500	
Picture Quality																			
Detail Clarity Processor	4	4	4	4	4	4	4	-	-	-	-	-	-	-	-	-	-	-	-
System Daylight View	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Daylight View	-	-	-	-	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic
3D Ready	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
HDR compatible	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Dynamic Contrast	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-
Dynamic Contrast NX	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Rich Color Harmonizer	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Rich Color Enhancer	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Pure White Generator	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
240Hz content playback	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Reliability																			
24/7 operation	-	-	-	-	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-
Backup Input	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Filter-Less	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Installation																			
Geometric Adjustment	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-
Free Grid	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-
Edge Blending/Color Matching	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-
Multi-Unit Brightness and Color Control	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
360-degree free installation	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-
Contrast Sync and Shutter Sync	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-
Corner Keystone	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Curved Screen Correction	✓	✓	✓	✓	✓	✓	✓	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓
Function																			
Mechanical Shutter	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	-	✓	✓	-	-	-	-
Data Cloning Function	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-
DIGITAL LINK	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wireless Function	✓ ¹	✓ ¹	✓ ¹	✓ ¹	-	-	-	-	-	-	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹
Mirroring Function	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
USB Memory Viewer	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
USB Memory Viewer Light	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
P-in-P	-	-	-	-	-	-	-	✓	✓	✓	-	-	-	-	-	-	-	-	-
Emulation	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Software																			
Geometry Manager Pro	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-
Smart Projector Control	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-
Multi Monitoring & Control Software	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wireless Manager	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Plug and Share	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Presenter Light	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓
Logo Transfer Software	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Projector Network Setup Software	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-

1: To operate wireless function, the optional Wireless Module is required.

Features (Portable, Short Throw/ Ultra Short Throw)

Features	PT-VMZ71	PT-VMZ61	PT-VMZ51	PT-VMZ51S	PT-LMZ460	PT-LMZ420	PT-LMW460	PT-LMW420	PT-LMX460	PT-LMX420	PT-VW360	PT-VX430	PT-LW376	PT-LW336	PT-LB426	PT-LB356	PT-LB306	PT-TMZ400	PT-TMW380	PT-TMX380	PT-TW381R	PT-TW380	PT-TX440	PT-TX350	PT-CMZ50	
Picture Quality																										
Detail Clarity Processor	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
System Daylight View	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
Daylight View	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Basic	Lite	Lite	Lite	Lite	Lite	Basic	Basic	Basic	Lite	Lite	Lite	Lite	Lite	-
3D Ready	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
HDR compatible	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Dynamic Contrast	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	✓	✓	✓	-	-	-	-	-	✓
Dynamic Contrast NX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Rich Color Harmonizer	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Rich Color Enhancer	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Pure White Generator	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
240Hz content playback	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Reliability																										
24/7 operation	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Backup Input	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Filter-Less	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Installation																										
Geometric Adjustment	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Free Grid	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2
Edge Blending/Color Matching	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
Multi-Unit Brightness and Color Control	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
360-degree free installation	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	✓	✓	✓	-	-	-	-	-	✓
Contrast Sync and Shutter Sync	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Corner Keystone	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Curved Screen Correction	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Function																										
Mechanical Shutter	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Data Cloning Function	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DIGITAL LINK	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
Wireless Function	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	-	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	✓ ¹	
Mirroring Function	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
USB Memory Viewer	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
USB Memory Viewer Light	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
P-in-P	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Emulation	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	✓	✓	✓	-	-	-	-	-	✓
Software																										
Geometry Manager Pro	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Smart Projector Control	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Multi Monitoring & Control Software	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wireless Manager	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Plug and Share	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Presenter Light	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Logo Transfer Software	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Projector Network Setup Software	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	✓	✓	✓	-	-	-	-	-	✓

1: To operate wireless function, the optional Wireless Module is required.

2: PT-CMZ50 has a Grid Adjustment function similar to Free Grid, but these functions are different. Please refer to the operating manual.

Optional Accessories for 3-Chip DLP™ Projector (Large-Venue)

Model Type	Model Number	PT-RQ50K	PT-RQ35K	PT-RZ34K	PT-RQ25K	PT-RZ24K	PT-RQ18K	PT-RZ17K
Ceiling mount bracket								
High ceiling mount bracket	ET-PKD520H	-	-	-	✓	✓	✓	✓
Low ceiling mount bracket	ET-PKD520S	-	-	-	✓	✓	✓	✓
Projector mount bracket	ET-PKD521B	-	-	-	✓	✓	✓	✓
Frame	ET-PFD510 ¹	-	-	-	-	-	-	-
Replacement filter unit								
Replacement filter unit	ET-EMF330	-	-	-	-	-	-	-
Smoke cut filter	ET-SFR330 ²	-	-	-	-	-	-	-
Wireless module								
Wireless module	AJ-WM50	✓	✓	✓	✓	✓	✓	✓
Peripheral								
DIGITAL LINK Switcher	ET-YFB200G	✓	✓	✓	✓	✓	✓	✓
Digital Interface Box	ET-YFB100G	✓	✓	✓	✓	✓	✓	✓
Software								
Early Warning Software	ET-SWA100 Series ³	✓	✓	✓	✓	✓	✓	✓
Geometry Manager Pro Upgrade Kit	ET-UK20	✓ ⁵	✓ ⁵	✓ ⁵	✓ ⁵	✓ ⁵	✓ ⁵	✓ ⁵
Auto Screen Adjustment Upgrade Kit	ET-CUK10/CUK10P ⁴	✓ ⁵	✓ ⁵	✓ ⁵	✓ ⁵	✓ ⁵	✓ ⁵	✓ ⁵
Interface board (SLOT NX)								
DVI-D input signal board	ET-MDNDV10	✓	✓	✓	-	-	-	-
HDMI input signal board	ET-MDNHM10	✓	✓	✓	-	-	-	-
12G-SDI signal board	ET-MDN12G10	✓	✓	✓	-	-	-	-
3G-SDI input signal board	TY-TBN03G	-	✓	✓	-	-	-	-
12G-SDI optical board	ET-MDNFB10	✓	✓	✓	-	-	-	-
DisplayPort input signal board	ET-MDNDP10	✓	✓	✓	-	-	-	-
Interface board (Intel® SDM)								
12G-SDI Terminal Board	TY-SB01QS	-	-	-	✓	✓	✓	✓
DIGITAL LINK Terminal Board	TY-SB01DL	-	-	-	✓	✓	✓	✓
Wireless Presentation System Receiver Board	TY-SB01WP	-	-	-	✓	✓	✓	✓

1: This frame cannot be used when the separately sold ET-D75LE95 fixed focus lens is attached to the projector.

2: The smoke cut filter is an air filter unit for an applicable Panasonic projector, for when the projector is used at events or other situation where smoke, fog or haze is being generated as a special effect.

3: The suffix of the model number differs according to the license type.

4: The availability varies depending on the country.

5: Features are pre-activated, no need for activation.

Optional Accessories for 1-Chip DLP™ Projector (Installation)

Model Type	Model Number	PT-REQ12	PT-REQ10	PT-REQ80	PT-REZ12	PT-REZ10	PT-REZ80	PT-RCQ10	PT-RCQ80	PT-RZ120	PT-RZ790	PT-RZ690	PT-FRQ60	PT-FRQ50	PT-FRZ60	PT-FRZ50	PT-FRZ55
Ceiling mount bracket																	
High ceiling mount bracket with 6-axis adjustment mechanism	ET-PKD130H ¹	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-
Bracket assembly	ET-PKD130B	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
High ceiling mount bracket	ET-PKD120H	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Low ceiling mount bracket	ET-PKD120S	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Wireless module																	
Wireless module	AJ-WM50	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	✓	✓	-	-	-
Peripheral																	
DIGITAL LINK Switcher	ET-YFB200G	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Digital Interface Box	ET-YFB100G	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
D-Sub/S-VIDEO conversion cable	ET-ADSV	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	✓
Software																	
Early Warning Software	ET-SWA100 Series ²	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Geometry Manager Pro Upgrade Kit	ET-UK20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-
Auto Screen Adjustment Upgrade Kit	ET-CUK10/CUK10P ³	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-
Interface board (SLOT NX)																	
DVI-D input signal board	ET-MDNDV10	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-
HDMI input signal board	ET-MDNHM10	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-
12G-SDI signal board	ET-MDN12G10	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-
12G-SDI optical board	ET-MDNFB10	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-
DisplayPort input signal board	ET-MDNDP10	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-
Interface board (Intel® SDM)																	
12G-SDI Terminal Board	TY-SB01QS	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
DIGITAL LINK Terminal Board	TY-SB01DL	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-
Wireless Presentation System Receiver Board	TY-SB01WP	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-

1: Recommended when used with the ET-DLE035.

2: The suffix of the model number differs according to the license type.

3: The availability varies depending on the country.

4: Features are pre-activated, no need for activation.

Optional Accessories for LCD Projector (Installation)

Model Type	Model Number	PT-MZ20K	PT-MZ17K	PT-MZ14K	PT-MZ11K	PT-MZ880	PT-MZ780	PT-MZ680	PT-EZ770Z	PT-EW730Z	PT-EX800Z	PT-EZ590	PT-EW650	PT-EW550	PT-EX620	PT-EX520	PT-FZ570	PT-FW530	PT-FX500	
Replacement lamp unit																				
400 W UHM lamp x 1	ET-LAE300	-	-	-	-	-	-	-	✓	✓	✓	-	-	-	-	-	-	-	-	
320 W UHM lamp x 1	ET-LAEF100	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	
Ceiling mount bracket																				
High ceiling mount bracket with 6-axis adjustment mechanism	ET-PKD130H ¹	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
High ceiling mount bracket	ET-PKD120H	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Low ceiling mount bracket	ET-PKD120S	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Bracket assembly	ET-PKE301B	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	
Bracket assembly	ET-PKE300B	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Replacement filter unit																				
Replacement filter unit	ET-RFE300	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	
Replacement filter unit	ET-RFF200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	
Replacement filter unit	ET-RFM100	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	
Wireless module																				
Wireless module	ET-WML100 ²	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	
Wireless module	AJ-WM50	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Peripheral																				
DIGITAL LINK Switcher	ET-YFB200G	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	-	✓	✓	✓	
Digital Interface Box	ET-YFB100G	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	-	✓	✓	✓	
D-Sub/S-VIDEO conversion cable	ET-ADSV	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	
Software																				
Early Warning Software	ET-SWA100 Series ⁴	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Geometry Manager Pro Upgrade Kit	ET-UK20	✓ ⁵	✓ ⁵	✓ ⁵	✓ ⁵	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Auto Screen Adjustment Upgrade Kit	ET-CUK10/CUK10P ³	✓ ⁵	✓ ⁵	✓ ⁵	✓ ⁵	-	-	-	-	-	-	-	-	-	-	-	-	-	-	

1: Recommended when used with the ET-EMU100.

2: Stock limited.

3: The availability varies depending on the country.

4: The suffix of the model number differs according to the license type.

5: Features are pre-activated, no need for activation.

Optional Accessories for LCD Projector (Portable, Short Throw/ Ultra Short Throw)

Model Type	Model Number	Portable												Short Throw/ Ultra Short Throw													
		PT-VMZ71	PT-VMZ61	PT-VMZ51	PT-VMZ51S	PT-LMZ460	PT-LMZ420	PT-LMW460	PT-LMW420	PT-LMX460	PT-LMX420	PT-VW360	PT-VX430	PT-LW376	PT-LW336	PT-LB426	PT-LB356	PT-LB306	PT-TMZ400	PT-TMW380	PT-TMX380	PT-TW381R	PT-TW380	PT-TX440	PT-TX350	PT-CMZ50	
Replacement lamp unit																											
270 W UHM lamp x 1	ET-LAV400	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
230 W UHM lamp x 1	ET-LAV300	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-
230 W UHM lamp x 1	ET-LAL510	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	-	-	-	✓	✓	✓	✓	-	-
Mount/bracket																											
High ceiling mount bracket with 6-axis adjustment mechanism	ET-PKD130H	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
High ceiling mount bracket	ET-PKD120H	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
Low ceiling mount bracket	ET-PKD120S	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
High ceiling mount bracket	ET-PKL100H	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-
Low ceiling mount bracket	ET-PKL100S	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-
Wall mount bracket	ET-WBC100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
Bracket assembly	ET-PKL430B	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	-	-
Bracket assembly	ET-PKL420B	-	-	-	-	✓	✓	✓	✓	✓	✓	-	-	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-
Bracket assembly	ET-PKV400B	✓	✓	✓	✓	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Bracket assembly	ET-PKE301B	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
Replacement filter unit																											
Replacement filter unit	ET-RFV500	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
Replacement filter unit	ET-RFV410	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Replacement filter unit	ET-RFV400	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Replacement filter unit	ET-RFV300	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Replacement filter unit	ET-RFL400	-	-	-	-	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	✓	-
Replacement filter unit	ET-RFL300	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	-	-	-	✓	✓	✓	✓	✓	-
Wireless module																											
Wireless module	ET-WML100 ¹	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	-	-	-	-	✓	✓	✓	✓	✓	✓	-
Wireless module	AJ-WM50	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Easy wireless stick	ET-UW100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Peripheral																											
DIGITAL LINK Switcher	ET-YFB200G	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	✓	✓	✓	-	-	-	-	-	✓
Digital Interface Box	ET-YFB100G	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	-	-	-	-	-	-	✓	✓	✓	-	-	-	-	-	✓
Interactive Light pen	ET-PEN100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	-	-	-	-	-
Interactive Pointer	ET-PNT100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	-	-	-	-	-
D-Sub/S-VIDEO conversion cable	ET-ADSV	-	-	-	-	-	-	-	-	-	-	✓	✓	✓	✓	✓	✓	✓	-	-	-	✓	✓	✓	✓	✓	-
Software																											
Early Warning Software	ET-SWA100 Series ²	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

1: Stock limited.
2: The suffix of the model number differs according to the license type.

Large-Venue
Installation
Portable
Short Throw/ Ultra Short Throw
Lenses
Features
Options
PressIT
Software/Apps

Optional Frames (Mechanical Solutions for Projectors)

ET-RFD series

Main Features:

- Convertible design highlight*
- Full stacking compatibility to previous frame models in the same size
- Built-in galvanic insulation
- DGUV-17 verified

*except P31H / P31H-US



Optional Frames Panasonic projectors

EU MARKET	ET-RFD40	ET-RFD50	ET-RFD65	ET-RFD60	ET-RFD70	ET-RFD70H	ET-RFD80
Dimensions [W + H + D] [mm]	650,5 x 353,5 x 683	768,5 x 373 x 678	778 x 388,5 x 721,4	750 x 435 x 883	750 x 540 x 883	749 x 540 x 894	897 x 639,45 x 1224
Weight [kg] (frame)	13.5	14.5	15.5	16	17.5	18.5	37,6
Maximum projector weight [kg] incl. lens	35	35	50	70	80	80	350
Possible orientation	Landscape, Portrait, Vertical down	Landscape, Portrait, Vertical down	Landscape, Portrait, Vertical down	Landscape, Portrait, Vertical down	Landscape, Portrait, Vertical down	Landscape, Portrait, Vertical down	Landscape, Portrait, Vertical down
Maximum Stacking	Ceiling mount: 3 (with ET-LINK200/201 or ET-LINK210/211) Ceiling mount: 2 (with ET-LINK200/201 or ET-LINK210/211) Ceiling mount: 1 (with ET-LINK200/201 or ET-LINK210/211) Floor: 3	Ceiling mount: 3 (with ET-LINK200/201 or ET-LINK210/211) Ceiling mount: 2 (with ET-LINK200/201 or ET-LINK210/211) Ceiling mount: 1 (with ET-LINK200/201 or ET-LINK210/211) Floor: 3	Ceiling mount: 3 (with ET-LINK200/201 or ET-LINK210/211) Ceiling mount: 2 (with ET-LINK200/201 or ET-LINK210/211) Ceiling mount: 1 (with ET-LINK200/201 or ET-LINK210/211) Floor: 3	Ceiling mount: 2 (with ET-LINK200/201 or ET-LINK210/211) Ceiling mount: 1 (with ET-LINK200/201 or ET-LINK210/211) Floor: 2	Ceiling mount: 2 (with ET-LINK200/201 or ET-LINK210/211) Ceiling mount: 1 (with ET-LINK200/201 or ET-LINK210/211) Floor: 4	Ceiling mount: 2 (with ET-LINK200/201 or ET-LINK210/211) Ceiling mount: 1 (with ET-LINK200/201 or ET-LINK210/211) Table mount: 3	Ceiling mount: 1 (with ET-LINK200/201 or ET-LINK210/211) Floor: 3
Compatibility selection, more on request	PT-REQ12 series/ PT-REZ12 series/ PT- RZ690/ PT-RZ790/ PT-RZ990/ PT- RZ120	PT-MZ20/ PT-MZ17/ PT-MZ14/ PT-MZ11	PT-RQ25K/ PT-RQ18K/ PT- RZ24K/ PT-RZ17K	PT-RZ12/ PT-RZ21/ PT- RS20/ PT-RQ22/ PT-RQ13K	PT-RQ35K/ PT-RZ34K	PT-RQ35K/ PT-RZ34K	PT-RQ50

Mounting Solutions Projectors

ET-RFD70 vs ET-RFD70H (for RQ35K series)




ET-RFD70	ET-RFD70H
<ul style="list-style-type: none"> • Flexible and lightweight • Stacking of up to 2 projectors • 30mm pipes • Convertible design • Stacking compatibility to P31H • Extensive adjustment possibilities • Compatibel with the EVO-LINK series • DGUV 17 verified 	<ul style="list-style-type: none"> • An extremely stable and robust frame • Specially designed for the stacking of up to 4 projectors (more on request) • 40mm pipes • No convertible design • Stacking compatibility to P30 • Slightly reduced adjustment possibilities • Compatibel with the EVO-LINK series • DGUV 17 verified

Mechanical Solutions for Projectors

ET LINK Series

The perfect accessory for the FRAMES

- Strong, light and reliable
- Easy to use
- Large adjustment range thanks to ball joint
- Optionally available with fine adjustment system
- Black coating
- DGUV-V17 / V18 verified

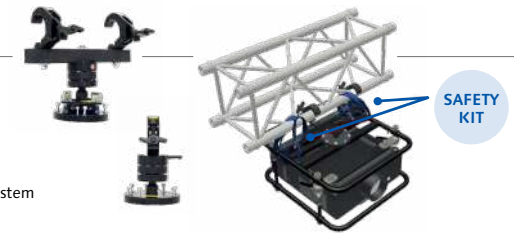


ET-LINK Series

DESCRIPTION	with selflock hook	with selflock hook and fine adjustment	with crossbeam and two selflock hooks	with crossbeam, two selflock hooks and fine adjust
PANASONIC ART. NR. EU	ET-LINK200	ET-LINK201	ET-LINK210	ET-LINK211
MAX WEIGHT LOAD - with safety wire	200kg	200kg	200kg	200kg

Wireless Presentation System "PressIT"

"PressIT" is a Panasonic's Wireless Presentation System that allows easy screen collaboration with just a single press of a button on a transmitter.

- 1 Easy connections with no app
- 2 Single button push a screen sharing
- 3 Multi-screen sharing up to 4

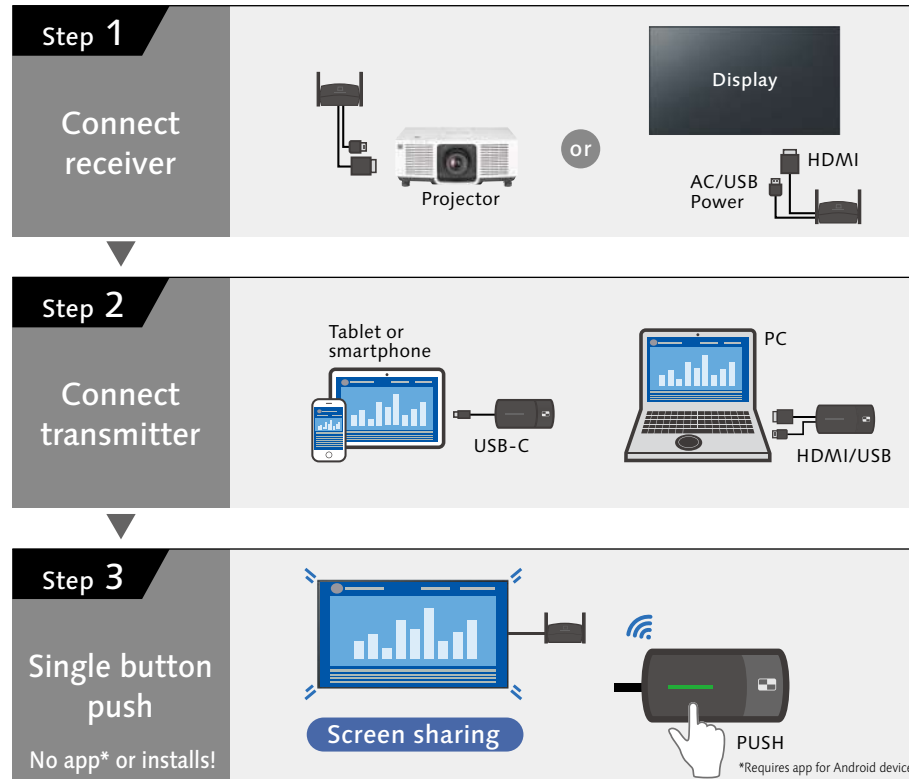

Connects to mobile devices
Genuine Digital AV adaptor by Apple is required.



Presents 4 screens in Full HD
[supports 4K]



High-definition video
max. resolution: 1920 x 1080 pixels, 60p

Low latency image

Connects up to 32 transmitters at once

Lock mode prevents interrupts

HDMI-CEC command compatible

Supports audio transmission


Share screen without transmitter¹

Shared from one transmitter to multiple receivers¹

¹ Firmware update is required. For details, please contact your dealer

PressIT

Lineup

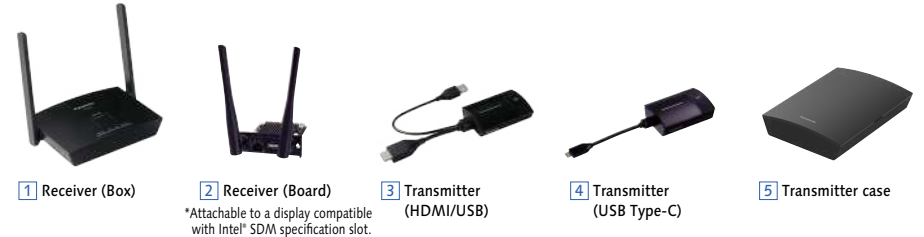

	Basic Set		Receiver (Box)	Receiver (Board)	Transmitter (HDMI)		Transmitter (USB Type-C)	
Model	TY-WPS1	TY-WPSC1	TY-WPR1	TY-SB01WP	TY-WP2B1	TY-WPB1	TY-WP2BC1	TY-WPBC1
Applicable product	Flat Panel Display /Projector (Panasonic and others)			*Attachable to a display compatible with Intel® SDM specification slot.	PC/Tablet/Smartphone			
What's included?	1 Receiver (Box) x1 3 Transmitter (HDMI) x2 5 Transmitter case x1	1 Receiver (Box) x1 4 Transmitter (USB Type-C) x2 5 Transmitter case x1	1 Receiver (Box) x1	2 Receiver x1	3 Transmitter (HDMI) x2 5 Case x1	3 Transmitter (HDMI) x1	4 Transmitter (USB Type-C) x2 5 Case x1	4 Transmitter (USB Type-C) x1

Specifications

Product	Receiver (Box)	Receiver (Board) ¹	Transmitter (HDMI)	Transmitter (USB Type-C)
Max resolution/ Framerate	1920 x 1080/60p (max), 3840 x 2160/30p (max)		1920 x 1080/60p (max)	
Number of simultaneous connections	32		-	
Number of sources simultaneous on screen	4		-	
Data Rate	10/100/1000 (Mbps)		-	
	Wired	Max. 867 Mbps	Max. 433 Mbps	
Wireless				
Frequency band	5 GHz band 5,150 MHz - 5,250 MHz 36 40 44 48 Channel			
Wireless transmission protocol	IEEE802.11/a/n/ac		IEEE802.11ac	
Security	WPA/WPA2/WPA3 (WPA3-Enterprise is not supported)			
Reach (Max distance between transmitter and receiver)	Max. 30 m (When the line of sight/wave conditions are good)			
Terminals	HDMI/USB-A (female) /RJ45(LAN)		HDMI/USB-A (male)/ USB-A (female)	USB-C (male)/ USB-A (female)
Power	DC 5 V/2 A	12 V/0.9 A (Display Power supply)	DC 5 V/0.9 A	
Power consumption	10 W		4.5 W	
Operating Environment	Temperature	0 °C to 35 °C (32 °F to 95 °F)	0 °C to 55 °C (32 °F to 131 °F)	0 °C to 35 °C (32 °F to 95 °F)
	Humidity	20 % to 80 % (No condensation)	20 % to 80 % (No condensation)	20 % to 80 % (No condensation)
Dimensions (W x H x D)	120 x 26 x 81 mm / 4.71" x 1.03" x 3.19" (Excluding antenna)	82 x 25 x 122 mm / 3.22" x 0.99" x 4.78" (Excluding antenna)	51 x 21 x 73 mm / 2.00" x 0.80" x 2.86" (Excluding cables)	51 x 26 x 73 mm / 2.00" x 1.00" x 2.86" (Excluding cables)
Weight	Approx. 181 g / 0.4 lbs	Approx. 125 g / 0.3 lbs	Approx. 110 g / 0.3 lbs	Approx. 110 g / 0.3 lbs

¹: Attachable to a display compatible with Intel® SDM specification slot.
*Case: Dimensions (W x H x D): 151.3 x 41.6 x 198.0 mm (6.0" x 1.7" x 7.8"),
Weight: Approx. 315 g / 0.7 lbs

For more information, please visit the following website.
<https://panasonic.net/cns/prodisplays/pressit>



PressIT360

Providing a more realistic feeling with the 360-degree camera speakerphone



360 degree camera speakerphone

TY-CSP1

Camera	Viewing angle: 360-degrees Shooting resolution: 2560 x 1440@30p x 4
Microphone	7
Speaker	Output 3 W
Dimensions	Diameter φ63.4 mm/2.5" (excluding the pedestal part) x Height 285 mm/11.3"

Optimal Video and Audio Transmission

TY-CSP1 is a hybrid conference terminal that enables 360-degrees horizontal shooting using four cameras and features microphones and speaker that also cover a wide range of 360 degrees. It supports natural communication with people participating in web conferences with its clear sound collection and amplification.

Simple Operation

For easy set-up and use, video, audio and power are shared to the PC via a single USB Type-C cable to save labor when preparing for a meeting. Volume and Video views can be controlled using the buttons arranged on the main unit pedestal. Operating status is instantly visible from the colored LED ring on the unit, it is possible to operate it intuitively.

Installation and Portability

With a diameter of φ63.4 mm (2.5 inches) that is easy to grip, it is possible to freely carry it around inside the office and easily carry out web conferences. Alternatively, it can be attached to a tripod or set securely fastened with security slots.

Equipped with various video modes



Dual View



Single View



Multi View



Surround View



Stable View


Smart Projector Control

SOFTWARE

Smart Projector Control is a smartphone application that enables various controls, from turning the power on and off to various lens adjustments.

Advantages

- The projector can be set and operated from the smartphone application, so there is no hassle associated with the remote control or main body buttons.
- Multiple projectors* can be operated simultaneously, and the status of a selected projector can be checked.
* Up to 64 projectors can be registered.
- A detailed screen of projectors registered in Early Warning Software can be displayed.

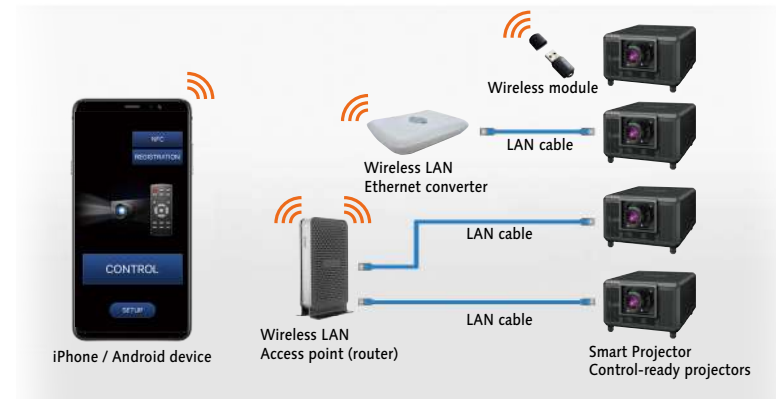


What you can do with Smart Projector Control

- 1 Turn the Projector On and Off
Open (off) and Close (on) the Shutter (AV mute control)
Display/Hide the On-Screen Menu
- 2 Confirm and Switch the Input Signals
- 3 Switch and Display the Test Patterns
- 4 Menu Settings (onscreen menu operation)
- 5 Lens Control (adjust the shift/zoom/focus)
- 6 Display the Projector Status
- 7 Link Predictive Monitoring Software (monitoring screen, settings and help display)



Control screen



Test pattern screen



Download Smart Projector Control (free) from App Store or Google Play.



For more information, please visit the website >>> panasonic.net/cns/projector/download/application/smartpj/

Geometric Adjustment Feature and Upgrade Kits Expand Projection Capability

FEATURES

Flexible projection with a peripheral system turns image viewing into a memorable experience. Panasonic offers features that provide truly unique applications.

Geometric Adjustment (free)

Projectors with a built-in Geometric Adjustment function expand projection capability onto spherical, cylindrical and other specially shaped screens.

Geometry Manager Pro Software and Upgrade Kit (for a fee)

Using this software allows you to perform real-time geometric compensation and other fine adjustments and corrections that cannot be handled on the projector side.



Geometry

Edge blending

Color matching

■ Upgrade Kit for Geometry Manager Pro (ET-UK20)

Expands the correctable range for Geometry Manager Pro Software. Custom Masking, Uniformity Correction, and other useful functions for multi-projector setups are supported.

■ Auto Screen Adjustment Upgrade Kit (ET-CUK10/CUK10P)¹

This is the plug-in software and expands the functions of Geometry Manager Pro. Allows automatic adjustment of geometry correction, edge blending, color, and brightness according to the shape of the screen through use of an externally connected camera.

Compatible Projector Models

	PT-RQ50K	PT-RQ35K	PT-RZ34K	PT-RQ25K	PT-RZ24K	PT-RQ18K	PT-RZ17K	PT-REQ12	PT-REQ10	PT-REQ80	PT-REZ12	PT-REZ10	PT-REZ80	PT-RCQ10	PT-RCQ80
Geometric Adjustment	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Geometry Manager Pro Software	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ET-UK20	Yes ²	Yes ²	Yes ²	Yes ²	Yes ²	Yes ²	Yes ²	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ET-CUK10/CUK10P ¹	Yes ²	Yes ²	Yes ²	Yes ²	Yes ²	Yes ²	Yes ²	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes


	PT-RZ120	PT-RZ790	PT-RZ690	PT-FRQ60	PT-FRQ50	PT-MZ20K	PT-MZ17K	PT-MZ14K	PT-MZ11K	PT-MZ880	PT-MZ780	PT-MZ680
Geometric Adjustment	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Geometry Manager Pro Software	Yes	Yes	Yes	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes
ET-UK20	Yes	Yes	Yes	No	No	Yes ²	Yes ²	Yes ²	Yes ²	No	No	No
ET-CUK10/CUK10P ¹	Yes	Yes	Yes	No	No	Yes ²	Yes ²	Yes ²	Yes ²	No	No	No

1: A firmware update is required to use these functions. Availability varies depending on the country. For more information, please contact the sales company in your region.
2: Features are pre-activated, no need for activation.

Multi Monitoring & Control Software

SOFTWARE

This free Panasonic software offers monitoring and control of up to 2,048 projectors and professional displays over a LAN network from a single PC to simplify management and maintenance while supporting stable operation. Also, by purchasing Early Warning Functions, you can remotely control and monitor the system with a web browser on a notebook PC or tablet device.

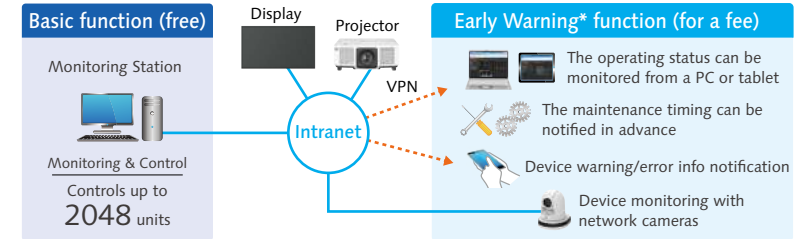

* Software function support varies by model.
* Multi Monitoring & Control Software Ver.2.0 or higher is required to use the Early Warning function.

Early Warning Function (ET-SWA100)

Maintenance Scheduling Suggestion³

It is easier to plan for maintenance by predicting the approximate time for maintenance and service based on the usage monitoring.

Video Stop Detection Using a Network Camera

Get an instant notification if the screen blanks or freezes during playback. Video can be recorded to identify where and when the problem occurred.



The captured image when an abnormality happens is stored

Free 90-day trial

Remote Preview Function

Preview content remotely



Remote Preview Saves Time and Unnecessary Stress

Newly introduced within Multi Monitoring & Control Software and also accessible via web browser, Remote Preview allows projectionists to check the content being received by the projector via a Wi-Fi® or LAN-connected laptop. It works with the projector in Standby, with the shutter on, or when direct sunlight makes inspecting on-screen images difficult. It gives a chance to fix errors between the source and projector before setup is completed.

1: Some devices can't be registered using the auto search function depending on the device status and network environment.
2: Software functionality varies depending on the model. 3: Function for supported projectors and professional displays only.



For downloading/activating the software and optional upgrade kits

PASS (Projector & Professional Display Asset Support System)

Providing comprehensive support for all Panasonic projector and professional display owners and people who are interested in those products.

Utility Software can be downloaded from PASS

- Auto Screen Adjustment Upgrade Kit (ET-CUK10/CUK10P)
- NFC Upgrade Kit [ET-NUK10]
- Geometry Manager Pro and Upgrade Kit (ET-UK20)
- Early Warning Software (ET-SWA100 Series)

For more information, please visit the PASS system >>> panasonic.net/cns/projector/pass/

Entertainment

Grande Centre Point Space Pattaya (Thailand)

The first-ever PT-RQ50K deployed in SE Asia revitalizes a space themed hotel with dynamic projection mapping



Why Choose Panasonic Projectors?

- The projector that best portrayed our work was Panasonic's PT-RQ50K
- Panasonic sent a team of experts to create the spectacle together

Challenge

Transform the exterior of a themed hotel into an iconic landmark using high-brightness projection mapping over a kinetic façade.

Solution

Engage global technology partner Panasonic to co-create the attraction by providing Native 4K projection equipment, consultation services, and on-site support.

Equipment Installed



3-Chip DLP™ projector
PT-RQ50K (x1)



Zoom lens
ET-D3QW300 (x1)

Find more of this case study's details from the QR code at the right>>



Museum / Exhibition

Temple of Brunello, Siena (Italy)

Immersive projection in the Temple of Brunello, a magical place in the heart of Montalcino



Why Choose Panasonic Projectors?

- The images are sharp and the colors are vivid
- The walls that divide the space into three niches, are just over two meters deep. We solved thanks to the ultra-short throw Panasonic ET-DLE035 lenses

Challenge

Projection mapping on walls with exposed stone of the masterpieces of ancient art of the territory of Montalcino and Siena.

Solution

Six Panasonic PT-RZ690 projectors, with ET-DLE035 ultra short throw lenses, projecting onto walls eight meters wide and just over two meters deep.

Equipment Installed



1-Chip DLP™ Projector
PT-RZ690 (x6)



Fixed-focus lens
ET-DLE035 (x2)

Find more of this case study's details from the QR code at the right>>



Corporate / Business

Grand Cube Osaka International Convention Center (Japan)

Creating a high quality presentation space with bright, easy-to-see 4K high quality image projection.



Why Choose Panasonic Projectors?

- High brightness, 4K-resolution image projection that makes text easy to see
- The system is bright enough to be used without dimming the lighting of the venue, and is flexible enough to be used for both streaming and on-site events

Challenge

- To provide a high-quality conference space
- To install projectors that can be used without dimming the lights

Solution

Installed the world's brightest 3-Chip DLP™ 4K Projector capable of high-definition images
Replaced with projectors capable of highly visible images without dimming the lighting

Equipment Installed



3-Chip DLP™ projector
PT-RQ50K (x1)



LCD projector
PT-MZ780 (x2) and more

Find more of this case study's details from the QR code at the right>>



Entertainment

Pavilion Bukit Jalil "Dome of Wonders" (Malaysia)

Immersive dome projection is a first for the Malaysian retail market, delighting visitors to pavilion Bukit Jalil



Why Choose Panasonic Projectors?

- The 3DLP technology that projects colors evenly on the dome
- Panasonic projectors are small and light enough for the confined installation image.

Challenge

Create an enthralling spatial media show at a popular Malaysian shopping mall using high-brightness projection mapping inside a large atrium dome.

Solution

Engage technology partner Panasonic to collaborate with design studio and installers to deliver an immersive mapping solution powered by PT-RZ34K 3-Chip DLP™ laser projectors.

Equipment Installed



3-Chip DLP™ projector
PT-RZ34K (x4)



Zoom lens
ET-D3LEW60 (x4)

Find more of this case study's details from the QR code at the right>>



Panasonic **CONNECT**

Panasonic Connect Europe GmbH
Hagenauer Strasse 43
65203 Wiesbaden
<https://eu.connect.panasonic.com/projectors>